REVISIONS				
REV	NO	DESCRIPTION	DATE	APPROVED
	A	PC 4 WAS NOMOTH-SAM P/N	DR 1-21-91	
	B	PC 5 WAS A/SE LC, PC 13 WAS 4 SB LG	DR 5-12-91	

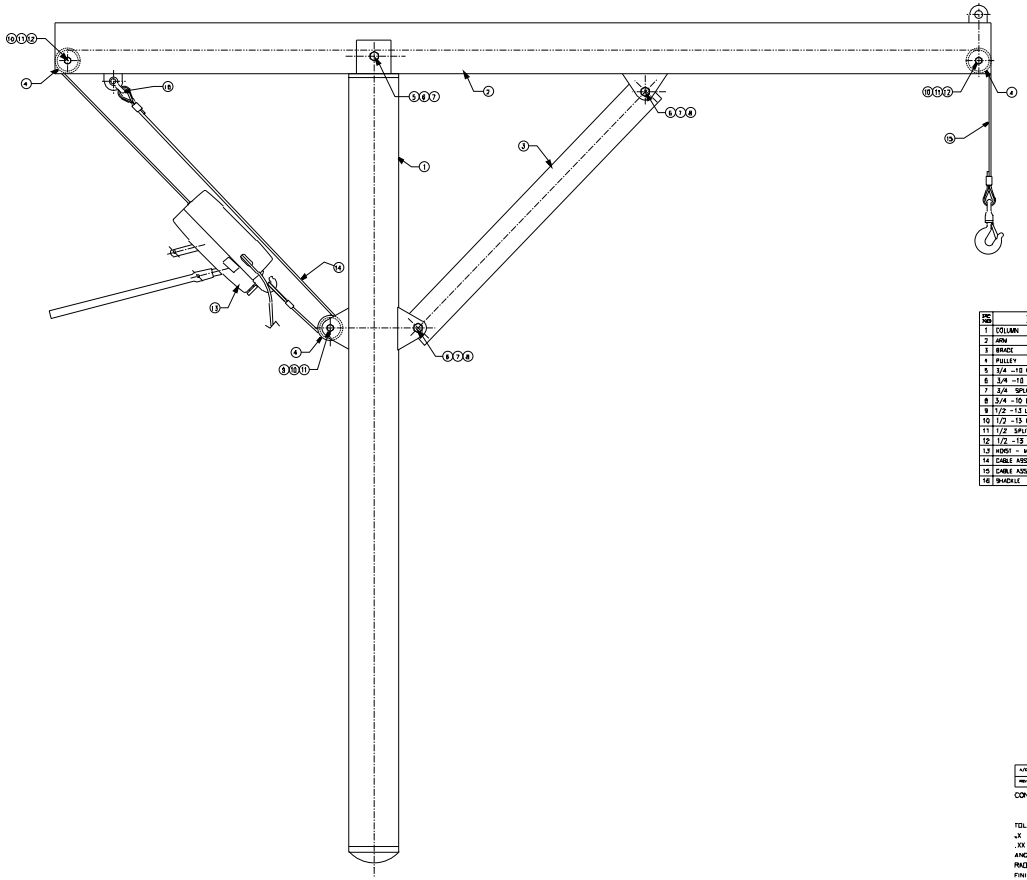

ITEM NO	DESCRIPTION	QTY	MATERIAL	USCG DWG NO/SPEC	USCG DWG NO
1	COLUMN	1	ALUM	4-28417	171 601
2	ARM	1	ALUM	4-28418	171 602
3	BRACE	1	ALUM	3-28419	171 603
4	PULLEY	3	POWR METAL	SAWSEL P/N D8070HO	
5	3/4 -10 UNC X 5.50 HEX HD C'SCW	1	STNLS STL	-	-
6	3/4 -10 UNC HEX NUT	3	STNLS STL	-	-
7	3/4 SPLIT LOCKWASHER	3	STNLS STL	-	-
8	3/4 -10 UNC X 5.50 HEX HD C'SCW	2	STNLS STL	-	-
9	1/2 -13 UNC X 2.00 HEX HD C'SCW	1	STNLS STL	-	-
10	1/2 -13 UNC HEX NUT	3	STNLS STL	-	-
11	1/2 SPLIT LOCKWASHER	3	STNLS STL	-	-
12	1/2 -13 UNC X 4.50 HEX HD C'SCW	2	STNLS STL	-	-
13	HOIST - MANUAL	1	CRAPHOIST SUPER PULL-ALL		
14	CABLE ASSEMBLY - ANCHOR	1	STNLS STL	3-28572	171 604
15	CABLE ASSY. - HOIST - 100 FT.	1	STNLS STL	3-28702	171 605
16	SHACKLE	1	SAWSEL P/N 75PA376 5/8		

REV	DATE	ORIG.	DESCRIPTION	BY
A/C	06/01/01	-	ANCHOR CABLE (PO 14) SHORTENED TO 40'+10'	DAE

CONTRACT NUMBER DTCG23-91-C-EC1067

TOLERANCES UNLESS OTHERWISE SPECIFIED:
.X ±12" .XXX ±006"
.XX ±015" .XXXX ±0005"
ANGLES 5°
RADII .03"
FINISH 125 RMS

DICHROMA, INCORPORATED
ALEXANDRIA, VIRGINIA
(703) 821-1440

CONSULTANTS

U. S. COAST GUARD
CIVIL ENGINEERING
WASHINGTON, DC

USCG, COMDT G-SEC-2
2100 2ND STREET SW
WASHINGTON, DC 20593-0001

ISSUE

MARK	DATE	DESCRIPTION
D1	06/01/01	LV

A/E PROJECT NO: 236
CAD FILE NAME: 2171600001
DESIGNED BY: DAE
DRAWN BY: DAE
EDITED BY: LV
CHECKED BY: LWB

SCALE: 1/4"=1'-0" PLOT SCALE:

SHEET TITLE

DAVIT/CLAMP
G-SEC-2C
WASHINGTON DC

DAVIT ASSEMBLY

REVIEWED BY:	REVIEWED BY:	REVIEWED BY:
JM		
PROJECT ENG.	BRANCH CHIEF	G-SEC-2
CHIEF, CIVIL ENG		10/23/91 DATE

PROJECT NUMBER	DRAWING NUMBER
98-	171 600
DISCIPLINE/SHT NO	SHEET 1 OF 1