

Auxiliary Machinery Systems

1. SCOPE

1.1 Scope. This standard specification describes the requirements for the Contractor to inspect, repair, and test auxiliary machinery systems and their components onboard Coast Guard vessels.

1.2 Appendices. The following appendices are included in this standard specification:

TITLE	APPENDIX
General Inspection Requirements	A
General Testing Requirements	B
Hydraulic Systems	C
Deck Machinery Systems	D

2. APPLICABLE DOCUMENTS

Commercial Item Description (CID), A-A-50433, Feb 1989, Grease, Sea Water Wash Resistant

Federal Specification (Fed Spec) RR-W-410, Feb 2002, Wire Rope And Strand

MIL-PRF-18458, May 2003, Grease, Wire Rope-Exposed Gear

MIL-A-22262, Mar 1996, Abrasive Blasting Media Ship Hull Blast Cleaning

Coast Guard Maintenance and Logistics Command Atlantic (MLCA), Standard Specification 0000_STD, 2004 Edition, General Requirements

Coast Guard Maintenance and Logistics Command Atlantic (MLCA), Standard Specification 0740_STD, 2004 Edition, Welding and Allied Processes

Coast Guard Fleet Drawing FL-1702-11, Rev-, Inspection of Sheaves

Coast Guard Commandant Instruction (COMDTINST) M10360.3, Nov 2003, Coatings and Color Manual
<http://isddc.dot.gov/OLPFiles/USCG/010968.pdf>

American Petroleum Institute (API) Specification 9A, 1995, Specification for Wire Rope

American Society of Mechanical Engineers (ASME) A1023, May 2002, Standard Specification for Carbon Steel Wire Ropes for General Purposes

American Society for Testing and Materials (ASTM) D4174, Reapproved 1999, Standard Practice for Cleaning, Flushing, and Purification of Petroleum Fluid Hydraulic Systems

American Society for Testing and Materials (ASTM) E2261, 2003, Standard Practice for Examination of Welds Using the Alternating Current Field Measurement Technique

International Standard Organization (ISO) 3448, 1992, Industrial Liquid Lubricants - ISO Viscosity Classification

International Standard Organization (ISO) 4406, 1999, Hydraulic Fluid Power - Fluids - Method for Coding Level of Contamination by Solid Particles

Manufacturers Standardization Society of the Valve and Fittings Industry, Inc. (MSS), SP-69, 2002 Edition, Standard Practice for Pipe Hangers and Supports - Selection and Application

Manufacturers Standardization Society of the Valve and Fittings Industry, Inc. (MSS), SP-89, 1998 Edition, Standard Practice for Pipe Hangers and Supports - Fabrication and Installation Practices

Society of Automotive Engineers (SAE) J1942-1, 1999, Qualified Hoses for Marine Applications

3. REQUIREMENTS

3.1 General requirements. The Contractor shall adhere to the following general requirements:

3.1.1 Sequencing the performance of work. Determine the optimal sequence for performing the tasks specified in the work item. Unless stated explicitly, no sequence of work is implied within a work item except:

- Grooming of a deck machinery system shall always be performed immediately prior to operational and weight testing of that system.
- Operational and weight testing of a deck machinery system shall always be performed after all other work on that system has been completed.

3.1.2 Extent of system disassembly. When disassembly is required to perform specified work, disassemble the system only to the extent necessary to perform the work specified.

3.1.3 Protection of fine surfaces. Protect all fine surfaces exposed while a component, assembly, or system is disassembled for repair. Install protective coverings that will prevent damage and corrosion. Remove and dispose of all protective coverings prior to reassembly.

3.1.4 Hydraulic system contamination protection. Maintain existing hydraulic system cleanliness. Take all necessary precautions to prevent the introduction of contaminants. Whenever disconnecting or removing components from a hydraulic system, immediately and completely seal all openings to the component and the rest of the system. Use either caps for externally threaded connection points, bolt-on blanks, or taped-on discs and covers of durable plastic or sheet-metal no less than 1/16-inch thick. Plastic bags may be used only when arrangement or configuration prevents the use of the other sealing methods specified above. Filling openings with rags or other articles is prohibited.

3.1.5 Mandatory renewals. Renew the following, unless otherwise specified in the work item:

- All disturbed software.
- All disturbed self-locking fasteners.
- All hydraulic fluid lost or contaminated during the performance of work.
- All lube oil lost or contaminated during the performance of work.

3.1.6 Turn-in or disposal of renewed components. Turn in components being renewed to the Coast Guard Property Administrator when specified in the work item. Otherwise dispose of components being renewed in accordance with all applicable Federal, state, and local regulations.

3.1.7 Cleaning of hydraulic system components at reassembly. Prior to installing a new or disturbed hydraulic component into a system, clean all exposed internal surfaces of that component that will come in contact with working system fluid to cleanliness Grade A (see 5.1.2 "Cleanliness Grade A").

3.1.8 Disposal of oils, oily rags, and other hazardous materials. Dispose of all oils, hydraulic fluids, contaminated cleaning materials, or any other hazardous wastes and materials that have been drained, lost, spilled, or otherwise removed during work on any system, in accordance with all applicable Federal, state, and local regulations.

3.1.9 Shaft coupling alignment. Align all new and disturbed shaft coupling assemblies. Unless otherwise specified in the task description or in the system specifications, verify that each hub is round to within 0.002 inches total indicator run-out, and then align both hubs to within 0.005 inches total indicator run-out radial and peripheral per inch of shaft radius.

3.1.10 Padeye and tie down weld repairs. Pull test all padeyes and tie downs that have been weld-repaired. Perform testing specified in paragraph 3.2.2.7 (Pull test), after performing nondestructive inspection (NDI) of the weld-repair in accordance with Std Spec 0740_STD, Appendix C.

3.1.11 Mandatory testing requirements. Be aware that an operational and weight test is required for a deck machinery system whenever an associated mechanical load bearing or mechanical power transmission component is disturbed (i.e., overhauled, repaired, renewed, removed and replaced as an interference, etc...).

3.2 Work item table interpretations. The Contractor shall interpret the table in work items that reference this standard, as described in paragraph 5.2 (Work item interpretation) and 5.3 (Standard task types) herein. Perform the work described below as specified in each task description within the work items.

3.2.1 GFP. Be aware that one or more "Government-furnished property" items listed in Section 5 of the work item apply to each task description that specifies "GFP" in the cell beneath the "Additional Requirements > Other" header.

3.2.2 Task types. The following task types denote specifications for work.

3.2.2.1 Operate and inspect. When "Operate and Inspect" is specified in a task description, perform the following:

- Perform a no-load operational test on the system. While the Coast Guard Inspector cycles all actuators, controls, shafting, and linkages associated with the system, note all unusual noise, vibration, overheating, binding, misalignment, maladjusted controls, and malfunctioning controls or read-outs found in the system. Ensure all of these conditions or other details are reported in the CFR.
- An operational test using test weights is not required. However, to supplement the no-load test specified and required above, the Contractor may request to have test weights handled. The test weights shall be handled only after the COR determines that the system is safe to handle weights and has approved the request. All test weights and all necessary rigging equipment shall be furnished by the Contractor. The rated load of the system shall not be exceeded. Furnishing and handling test weights for the purpose of troubleshooting shall result no additional cost to the Government.
- At the conclusion of all operations, perform a visual inspection of the system. Open or remove all inspection covers in the system, as applicable, to facilitate visual inspections. Do not disassemble or disturb mechanical load bearing components or mechanical power transmission components prior to or during the inspection. Inspect all accessible surfaces of each component in the system as specified in Appendix A (General Inspection Requirements).
- Inspect sheave assemblies, as applicable, using Coast Guard Drawing FL-1702-11 as a guide.
- Submit a CFR for the completed tests and inspections.

3.2.2.2 Service and inspect. When "Service and Inspect" or "Service, Inspect" is specified in a task description, perform the following in conjunction with all other work specified:

- Remove inspection plates, cover plates, and other non-mechanical load bearing components, as applicable, to gain access to hidden surfaces of the component or assembly. Do not disturb mechanical load bearing components or mechanical power transmission components prior to or during the inspection.
- Clean all accessible uncoated surfaces of the component or assembly to cleanliness Grade A unless otherwise directed by applicable appendix, or in the task description.
- Inspect all accessible surfaces in accordance with Appendix A (General Inspection Requirements) and submit a CFR for the completed inspection.
- If a Change Request has been authorized and released by the KO, perform all work resulting from modifications or amendments to the task description as specified.
- Lubricate uncoated surfaces of the component or assembly as specified in the system specifications, the task description, or referenced appendix. When a lubricant is not specified in the task description, system specifications, or appendix of this standard use a lubricant conforming to CID A-A-50433.
- Prior to reinstalling removed covers, plates, and non-mechanical load bearing components perform all other work specified or invoked by the task description.
- Reinstall all removed parts and return the component to normal operating condition.

3.2.2.3 Overhaul and inspect. When "Overhaul and Inspect" or "Overhaul, Inspect" is specified in a task description, perform the following in conjunction with all other work specified:

- Completely disassemble the specified component or assembly.
- Determine which sub-components are wearing components. Inspect all exposed uncoated surfaces of all non-wearing sub-components in accordance with Appendix A (General Inspection Requirements). Submit CFR for the completed inspection.

- Clean all accessible uncoated surfaces of the component or assembly to cleanliness Grade A unless otherwise directed by applicable appendix, or in the task description.
- Renew each sub-component that corresponds to a component furnished as GFP for the task description.
- If a Change Request has been authorized and released by the KO, renew each component determined to be a wearing component and perform all work resulting from modifications or amendments to the task description as specified in the Change Request.
- Lubricate uncoated surfaces of the component or assembly as specified in the system specifications, the task description, or referenced appendix. When a lubricant is not specified in the task description, system specifications, or appendix of this standard, use a lubricant conforming to CID A-A-50433.
- Perform all other work specified or invoked by the task description that can only be performed prior to reassembling the component or assembly.
- Reassemble the component or assembly and return it to normal operating condition within the system.

3.2.2.4 Preservation.

3.2.2.4.1 When "Preserve" is specified in a task description, perform the following in conjunction with all other work specified:

- Prepare and coat all previously coated surfaces of the specified component, assembly, or area in accordance with Std Spec 0000 STD, paragraph 3.10 (General preservation requirements) and in accordance with COMDTINST M10360.3, using the coating system specified for "Machinery, Deck, Option I" in Appendix A (Cutter and Boat Exterior Paint Systems) and using material brands as specified in Appendix C (Authorized Coatings For Use On Cutters and Boats).
- When "establish profile" is specified in a task description, abrasive-blast (in lieu of water-jetting) the specified area or component to achieve an anchor tooth profile of 1.5 to 2.5 mils on all previously coated surfaces.

NOTICE!

Typically “establish profile” will be specified in the task description when a component or area is known to have a corrosion problem that can be attributed to improper surface preparation.

- Use spar (10371) as the finish coat color unless otherwise specified by applicable appendix of this standard or in the task description.

3.2.2.4.2 When “Overcoat” is specified in a task description, perform the following in conjunction with all other work specified:

- Prepare and coat all previously coated surfaces of the specified component, assembly, or area in accordance with Std Spec 0000_STD, paragraph 3.10 (General preservation requirements) and in accordance with COMDTINST M10360.3, using the coating system specified for “Machinery, Deck, Option I” in Appendix A (Cutter and Boat Exterior Paint Systems) and using material brands as specified in Appendix C (Authorized Coatings For Use On Cutters and Boats), with the following exceptions:
 - Accomplish low-pressure (1-2k psi) fresh water wash of the surfaces, to remove soluble chlorides and other surface contaminants.
 - Abrasive-blast or power tool clean all rusted/failed areas to “near-white” or “bare” metal, respectively; feather bare areas to adjacent sound coating.
 - Roughen the existing intact top-coating in remaining areas, by abrasive sweep-blasting or power tooling.
 - Perform solvent cleaning of all surfaces.
 - Apply two coats of high build epoxy over the “bare” metal surfaces at 5.0 mils DFT each.
 - Apply one coat of Polysiloxane at 5.0-6.0 DFT, over all surfaces.
- Select spar (10371) as the finish coat color unless otherwise specified by applicable appendix of this standard or in the task description.

3.2.2.4.3 Inspect and preserve. When "Inspect and Preserve" is specified in the task description, inspect the area specified and submit CFR. If a Change Request has been authorized and released by the KO, prepare and coat the surface as specified in the Change Request and in accordance with Std Spec 0000_STD, paragraph 3.10 (General preservation requirements) and in accordance with COMDTINST M10360.3.

3.2.2.4.4 Machinery foundations. When preservation of a machinery foundation is specified, preserve all previously coated surfaces of the machinery foundation including all deck and bulkhead areas enclosed within a perimeter two inches out from the foundation's footprint.

3.2.2.5 Nondestructive examination (NDE). When "NDE" is specified in a task description, nondestructively examine the specified component, assembly, or area using either inspection method 1 or inspection method 2 below, in conjunction with all other work specified.

3.2.2.5.1 Inspection method 1. Inspection shall be performed using an alternating current field measurement technique (eddy current) in accordance with ASTM E2261 (coating removal is not required). All discontinuities detected by eddy current shall be reinspected by magnetic particle (MT) inspection for ferrous materials and by liquid penetrant (PT) inspection for nonferrous material as specified in Std Spec 0740_STD, Appendix C. The inspected area shall be clearly visible (e.g., free of paint, grease, etc.) when using the PT and MT methods. Submit a CFR for the completed inspection.

3.2.2.5.2 Inspection method 2. Inspection shall be performed by approved nondestructive methods such as radiographic (RT), ultrasonic (UT), MT, or PT inspection as specified in Std Spec 0740_STD, Appendix C. The inspected area shall be clearly visible (e.g., free of paint, grease, etc.) when using the PT and MT methods. Submit a CFR for the completed inspection.

3.2.2.6 Groom and lubricate. When "Groom and Lubricate" is specified in the task description, prepare the system for testing by performing the following, as applicable, in conjunction with all other work specified in the task description while the Coast Guard inspector operates the system in a no-load condition:

- Visually inspect all components in the system. Verify that all reservoirs and gear cases are filled to the level required in the system specifications.

WARNING!

Verify that all installed system isolation valves (e.g., return line valves, case drain line valves, etc.) are properly aligned prior to energizing and operating equipment, as applicable.

- Verify proper alignment of all installed system isolation valves, as applicable. Cycle all actuators. Verify that all associated control valves, electrical and mechanical controls, and actuators are operating properly.
- Remove air from the hydraulic system. Break mechanical joints at high points while cycling actuators, if required, to bleed air from the hydraulic system.
- Make adjustments, as required, to all disturbed components (e.g., sensors, controls, readouts, pressure control valves, flow control valves, etc...).
- Verify there are no lube oil or hydraulic fluid leaks.
- Identify all lubrication points in the system. Lubricate these points as specified in the task description or in the system specifications.

3.2.2.7 Pull test. When "Pull Test" is specified in the task description:

- Determine the required force for the pull test on the specified deck fitting as specified below:
 - For periodic testing of a deck fitting the force of pull on the fitting shall be 1.5 times the deck fitting's rated load.
 - For testing subsequent to a weld-repair of a deck fitting (i.e., renewal or repair of a fitting) the force of pull on the deck fitting shall be 2 times the deck fitting's rated load.
- Determine the proper direction to pull against the specified deck fitting. The proper direction shall be the direction in which the deck fitting and surrounding deck or bulkhead displays it's greatest resistance to damage and deformation.

NOTICE!

General purpose fittings are typically strongest when pulled perpendicular to the deck or bulkhead where they are attached. Special purpose fittings may be stronger in a direction specific to their intended use that may differ from perpendicular to the deck or bulkhead.

- Pull the specified deck fitting to the force and in the direction determined above and hold for one minute.
- Release the load and verify no permanent deformation or damage to the fitting or the surrounding deck or bulkhead, as applicable.
- Submit a CFR for the completed test.

3.2.2.8 Operational and weight testing. When "Op Test" or "Weight Test" or "Op and Weight Test" is specified in the task description:

- Contractor shall furnish all necessary temporary rigging gear (e.g., temporary wire ropes and pendants, external lifting devices such as a crane, strong-backs, test weights, tag lines, dynamometers, come-alongs, steamboat ratchets, shackles, dunnage, bumpers, etc...) required to perform the testing procedures invoked by the task description. Place dunnage under test weights to protect the vessel's deck and pier, as applicable. Place bumpers or other protective measures between the hull and pier when test procedures involve warping the vessel.
- Contractor shall furnish all necessary rigging services (e.g., riggers, external crane operators, etc...) required to perform the referenced testing procedures invoked by the task description.
- Conduct a briefing for cognizant shipboard personnel at least 24 hours prior to the specified test procedure.
- When weight testing is specified, determine the vessel's load status and verify that the vessel's stability is adequate and safe for performing the test procedure. Conduct weight testing only when the vessel is waterborne and only after at least one of the following three conditions have been met:
 - o The vessel is in a full liquid load condition.
 - o A full liquid load condition has been simulated through the use of equivalent weights that have been arranged shipboard to achieve the same metacentric height (GM) as a full liquid load condition.

- o The vessel's DCA or EO or EPO has determined that the vessel's stability meets or exceeds the minimum stability required to safely perform the test procedure.
- Avoid conditions that will cause sudden application of test loads.
- Keep test weights as close to the deck as possible while performing the test procedure to minimize damage to the vessel if control of the test weight is lost.
- Do not allow immersion of a deck edge or a list of over 15 degrees while performing the test procedure.
- Submit a CFR for the completed inspections and tests.

3.2.2.9 All other task types. The Contractor shall refer to the "Additional Requirements" columns of the task description for all other requirements.

4. QUALITY ASSURANCE

No additional requirements.

5. NOTES

5.1 Terms and definitions. The terms used in multiple sections of this standard specification are defined below.

5.1.1 "Assembly": A group of two or more interrelated components integral to a system that serve a distinct function. Typically, renewal of components within assemblies can be economically justified where renewal of entire assemblies as one unit can not be economically justified.

5.1.2 "Cleanliness Grade A": An uncoated surface is "cleanliness Grade A" when all visible or touchable areas of an accessible surface are free of grease, oil, flux, scale, dirt, loose particles or loose corrosion products, and all other contamination foreign to the base material of the surface. Light superficial rust on a carbon steel surface, caused by short time exposure to the atmosphere, is permitted. Potable water residues are permitted.

5.1.3 "Component": A group of one or more interrelated parts that are integral to a system that serve a distinct function. A part is a special case of a component. Components can generally be renewed as a unit.

5.1.4 "Deck Machinery System": A deck machinery system contains the union of all associated mechanical load bearing components, all mechanical power transmission component associated with a prime mover, and each component integral to the operation both of those sets of components and assemblies, up to and including their machinery foundations. If the prime mover is an electric motor then all components past the connection point to ship's service power are part of the system.

5.1.5 "Dynamic Load Test": A weight test used to verify that all mechanical power transmission components in a system are properly assembled, properly installed, properly adjusted, and are capable of producing enough force (i.e., pressure, torque, etc...) to hoist or haul the dynamic load. The weight specified for this test is typically just beneath the weight that the system is capable of hoisting or hauling when all mechanical power transmission components are properly assembled, properly installed, and properly adjusted. Systems installed on vessels and barges are designed to hoist or haul loads greater than their published rating in order to compensate for the increased line tensions experienced while operating in a sea state (dynamic loading).

5.1.6 "Fine surfaces": The term "fine surfaces" denotes the union of each of the following definitions:

- Each uncoated surface of a component whose finish is critical to the operation of the component.
- Each uncoated surface of a component that mates with or runs against a machined surface, a plated surface, or software.
- Plated surfaces.

5.1.7 "Haul": To pull a mechanical load in the horizontal plane.

5.1.8 "Hoist": To raise a mechanical load in the vertical plane.

5.1.9 "Mechanical load": The term "mechanical load" denotes each of the following definitions:

- A weight or mass not integral to a hoisting machine but suspended from a hoisting machine.
- A weight or mass not integral to a hauling machine but being hauled by a hauling machine.

5.1.10 "Mechanical load bearing components": Each component in a machine that is subjected to stress while supporting or moving a mechanical load.

5.1.11 "Machinery foundation": Structural members welded to or integral to the ship's structure designed to provide an interface for fastening one or more parts of the machine to the ship.

5.1.12 "Mechanical power transmission component": Each part in a machine, including those parts integral to the prime mover, that is subjected to stress generated by a prime mover.

5.1.13 "NDE": The act of determining the suitability of some material or component for its intended purpose using techniques that do not affect its serviceability.

5.1.14 "Part": A component that can be disassembled no further.

5.1.15 "Pin assembly": The union of all components attached to (e.g., by key, spline, stake, press fit, etc...) and mate with or run against a pin including all sleeves, bushings, and rolling contact bearings that support the pin. For example, when tasked to "Overhaul and Inspect" a "Sheave Pin Assembly", all components that mate with the pin (e.g., a sheave, at least one rolling contact bearing assembly or bushing) shall be disassembled and overhauled.

5.1.16 "Prime mover": The initial source of mechanical energy integral to a deck machinery system in the form of either an internal combustion engine or an electric motor driven directly by current from the ship's service generator.

5.1.17 "Rated Load Test": A weight test used to verify that all mechanical power transmission components in a system are properly assembled, properly installed, properly adjusted, and are capable of operating through a complete duty cycle without developing unusual or substandard performance characteristics (e.g., noise, binding, overheating, slow operation, etc...). The weight specified for this test is typically the published Working Load Limit (WLL) of the system.

5.1.18 "Self-locking fastener": A fastener assembly with a design feature (e.g., a soft insert, pre-deformed threads, etc.) for the purpose of adding friction to the threaded connection.

5.1.19 "Shaft assembly": The union of all components attached to (e.g., by key, spline, stake, press fit, etc...) and mate with or run against a shaft including all sleeves, bushings, and rolling contact bearings that support the shaft. For example, when tasked to "Overhaul and Inspect" a "Winch Drum Shaft Assembly", all components attached to the shaft (e.g., winch drum, at least two rolling contact bearing assemblies, a gear on gearbox end of the shaft, and all associated keys, seal, backing rings, etc...) shall be disassembled and overhauled. The associated gear box would be disassembled only to the extent required to access the specified shaft assembly.

5.1.20 "Software": The term "software" denotes the union of the following sets of components: seals, gaskets, o-rings, backing rings for o-rings, lip seals, v-ring packing, flax packing, and mechanical packing seals.

5.1.21 "Static Load Test": A weight test used to verify that a winch brake, a brake valve, or a counterbalance valve is properly assembled, properly installed, properly adjusted, and is capable of stopping and holding the dynamic load. The weight specified for this test is typically just beneath the weight that will cause a properly assembled, properly adjusted, and properly installed winch brake, brake valve, or counterbalance valve to slip/relieve. The test also verifies, to a lesser extent, the integrity of all other mechanical load bearing components in the system.

5.1.22 "System specifications": All requirements, configuration data, and process descriptions contained within system drawings, system technical publications, or other documents referenced by a work item or the standard that apply to the work specified. Where specifications provided by the system manufacturer disagree with specifications provided by a manufacturer of a component within that system, the specifications provided by the system manufacturer shall take precedent, unless otherwise specified.

5.1.23 "Task description": A unit of work described by six separate associated cells across one row of a table in a work item that references this standard.

5.1.24 "Task type": One or more words, typically verbs, that denotes a general description of work that can be performed on a component or assembly. Examples of standard task types are listed in paragraphs 5.2 (Work item interpretation) and 5.3 (Standard task types).

5.1.25 "Vital fastener assembly": A fastener assembly that is either a mechanical load bearing component or a mechanical power transmission component.

5.1.26 "Wearing components": The term "wearing components" denotes the union of the following sets of components:

- Software.
- Rolling contact bearings excluding turntable or turret bearings.
- Bushings used in a machine to constrain rotating shafts or mechanical load bearing pins.
- Springs.
- Friction discs in disc brakes and liners in band brakes.
- "Wear pads" and "wear strips" defined as relatively soft parts that slide against one or more relatively hard parts within a machine, the soft part being designed to wear at a much faster rate than the hard part.

5.2 Work item interpretation. Work items that reference this standard will contain a table similar to this sample.

Sample Table

				ADDITION REQUIREMENTS	
#	TASK TYPE	QTY	COMPONENT OR ASSEMBLY	APPENDIX AND PARA. FROM 5000 STD	OTHER
1	Operate and Inspect	2	Mechanical Chain Stopper Assemblies	N/A	Submit (CIR)
2	Adjust	2	Spring Packs	N/A	See paragraph 3.2.1
3	Weight Test	2	Mechanical Chain Stopper Assemblies	B-20.1	Static load test weight: 24,750 (+1238 -0) pounds Submit CFR.
4	Fabricate and Install	2	Label plates	B-20.9	System: Mechanical Chain Stopper Static Load Test Weight: 24,750# Dynamic Load Test Weight: N/A Rated Load Test Weight: N/A

5.2.1 Table description. The six column table will contain a shaded "header" row at the top of the table. One or more task description rows will follow the header. Each task description will consist of six separate associated cells that will describe the work to be performed on one or more components or assemblies. The relationship between the contents of the six cells in the task description is described below.

5.2.1.1 The cell beneath the "#" heading serializes the task description.

5.2.1.2 The cell beneath the "Task Type" heading specifies the task type associated with the task description. A task type denotes a general description of work that can be performed on a component or assembly.

5.2.1.3 The cell beneath the "Qty" heading specifies the number of separate components or assemblies associated with the task description.

5.2.1.4 The cell beneath the "Component or Assembly" heading will functionally describe one or more components or assemblies associated with the task description.

5.2.1.5 The cell beneath the "Additional Requirements > Appendix & Para." heading will be "N/A" or will contain one or more instances of a letter and a number separated by a hyphen. The letter specifies the applicable appendix in this standard and the number specifies the applicable paragraph number within the specified appendix.

5.2.1.6 The cell beneath the "Additional Requirements > Other" column will be "N/A" or will contain text that specifies one or more of the following:

- Modifications or amendments to the general description of work denoted by the task type.
- Modifications or amendments to the functional description of the component or assembly.
- Invoke requirements stated elsewhere in the work item that apply to the task description.
- Invoke other specifications and requirements stated or shown in other referenced applicable document.
- Specify platform, cutter, system, assembly, or component specific work descriptions, requirements, and data not found in any other document.

5.3. Standard task types. Standard task types include but are not limited to:

- Operate and inspect.
- Adjust.
- Renew.
- Renew and Preserve.
- Overhaul and Inspect.
- Overhaul, Inspect, and Preserve.
- Service and Inspect.
- Service, Inspect, and Preserve.
- Fabricate and Install.
- Fabricate, Install, and Preserve.
- Preserve.

- Preserve and Inspect.
- Preserve and NDE.
- NDE.
- Groom.
- Groom and Lubricate.
- Test.
- Pull Test.

APPENDIX A

General Inspection Requirements

10. SCOPE

10.1 Scope. This appendix describes the particular requirements for the Contractor to perform all inspections on Coast Guard deck machinery systems.

10.2 Inspection types. The following inspection requirements are covered in this appendix:

TITLE	PARAGRAPH
Joint inspections.	20.1
Pressure containing component inspections.	20.2
Mechanical power transmission component inspections.	20.3
Fine surface inspections.	20.4

20. REQUIREMENTS

20.1 Joint inspections. The Contractor shall inspect, either visually or physically by touch, all accessible mechanical joints for hydraulic fluid or air leaks, as applicable.

20.2 Pressure containing component inspections. The Contractor shall inspect, either visually or physically by touch, all accessible internal and external surfaces of the component that are used to contain pressurized gas or fluid for: impacts, deformation, warping, bending, yielding, excessive corrosion, loss of base material, cracks, and all other wear or damage that will affect the strength of the pressure-containing boundary or the proper, trouble-free, safe operation of the component. Examples of these components are pump cases, motor cases, valve bodies, cylinder bodies, cylinder tie rods, accumulator and flask bodies, hose assemblies, and heat exchanger tubing and shells.

20.3 Mechanical load bearing and mechanical power transmission component inspections. The Contractor shall inspect, either visually or physically by touch, all accessible surfaces of all components that transmit power for: impacts, deformation, warping, bending, yielding, mushrooming, excessive corrosion, excessive wear, unusual wear patterns, loss of base material, cracks, and all other wear or damage that will affect the strength of the component or the proper, trouble-free, safe operation of the component. Examples of these components are shafts, mechanical pins, keys, keyways, splines, set-screws, stakes, gear teeth, cams, cam-followers, couplings, cylinder rods, clevises, and trunnions.

20.4 Fine surface inspections. The Contractor shall inspect, either visually or physically by touch, all uncoated, fine surfaces of components for raised metal, nicks, burrs, scratches, scoring, heat checks, galling, pitting, gouges, corrosion, damage, yielding or stretching, excessive wear, and all other unusual discontinuities with surrounding surfaces that will affect sealing, flow rates and pressures, or the proper, trouble-free, safe operation of the component. Examples of these surfaces are cylinder bores, pistons, piston rods, all surfaces that mate with o-rings or seals, valve spools and spool bores, valve seats, and screw threads.

30. QUALITY ASSURANCE

No additional requirements.

40. NOTES

None.

APPENDIX B

General Testing Requirements

10. SCOPE

10.1 Scope. This appendix describes the particular requirements for the Contractor to perform testing of Coast Guard deck machinery systems.

10.2 System test requirements. The following paragraphs specify requirements for the associated system or task:

TITLE	PARAGRAPH
Mechanical chain stoppers	20.1
Hydraulic chain stoppers	20.2
Winches	20.3
Booms and cranes	20.4
Anchor Windlass	20.5
Capstans	20.6
Davits	20.7
Small Boats	20.8
Label plates	20.9

20. REQUIREMENTS

20.1 Mechanical chain stoppers.

20.1.1 No-load operational test. While the Coast Guard Inspector releases and resets the chain stopper a minimum of three cycles in a no-load condition, the Contractor shall:

- Verify that the reset spring does not bottom out (fully compress) when the stopper is fully extended.
- Verify that the spring fully resets the stopper.

20.1.2 Operational test. The Contractor shall:

- Suspend the operational load test weight specified in the work item from the stopper and hold for a minimum of 10 minutes using an external lifting device and an appropriately sized chain.

- Release the operational load test weight using the chain stopper's release mechanism.
- Verify that the stopper has no permanent deformation or damage.

NOTICE!

Static load weight testing mechanical chain stoppers is only required after weld-repairs have been performed on the chain stopper or its supporting structure.

20.1.3 Static load test. The Contractor shall:

- Suspend the static load test weight specified in the work item from the stopper and hold for a minimum of 10 minutes using an external lifting device and an appropriately sized chain.
- Remove the test weight.
- Verify that the stopper has no permanent deformation or damage.
- Return the chain stopper to its normal operating condition.

20.2 Hydraulic chain stoppers. The Contractor shall test hydraulic chain stoppers in conjunction with testing of the associated buoy chain winch.

20.2.1 No-load operational test. While the Coast Guard Inspector extends and retracts all actuators a minimum of three cycles, the Contractor shall verify proper operation and no unusual vibration, noise or binding.

20.2.2 Operational load test.

20.2.2.1 The Contractor shall suspend the operational load test weight specified in the work item from a chain that attaches to the buoy chain winch and passes through the chain stopper assembly.

20.2.2.2 While the Coast Guard Inspector demonstrates normal operational use of the stopper using the operational load test weight specified in the work item and the buoy chain winch to raise and lower the test load a minimum of three cycles, the Contractor shall:

- Verify that the rising sheave freely turns when the loaded chain is pulled through the sheave groove.

NOTICE!

The Coast Guard Inspector will set the chain in the stopper, slack the chain between the buoy chain winch and the stopper, re-tension the chain between the winch and the stopper, and lift the chain from the stopper with the rising sheave.

20.2.2.3 After the Coast Guard Inspector retrieves the operational load test weight using the buoy chain winch, the Contractor shall:

- Verify that the chain loaded with the test weight is properly released from the stopper with no unusual noise, vibration, or binding.
- Remove the test weight and verify that the stopper has no permanent deformation or damage.
- Return the chain stopper to its normal operating condition.

NOTICE!

Static load weight testing hydraulic chain stoppers is only required after weld-repairs have been performed on the chain stopper or its supporting structure.

20.2.3 Static load test. After the Coast Guard Inspector has fully retracted the sheave, the Contractor shall:

- Suspend the static load test weight specified in the work item from the stopper and hold for a minimum of 10 minutes using an external lifting device and an appropriately sized chain.
- Remove the test weight.
- Verify that the stopper has no permanent deformation or damage.
- Return the chain stopper to its normal operating condition.

20.3 Winches.

NOTICE!

During no-load operations ensure sufficient tension is kept on wire ropes to prevent improper wrapping on hoist drum.

NOTICE!

Strongbacks, external cranes, or other Contractor-furnished rigging devices may be needed to perform weight testing on winches not equipped with boom/sheave assemblies (i.e., cross deck winches, mooring winches, etc.)

20.3.1 No-load operational test. While the Coast Guard Inspector operates the winch in both directions a minimum of 2 minutes, the Contractor shall verify that:

- All controls and sensors are operating properly.
- No unusual vibration or noise is emitted from the winch and there is no binding or misalignment.
- Proper setting and release of the winch brake.

20.3.1.1 No-load test for level wind arm assemblies. Perform the following on winches that have a level wind arm assembly installed. While the Coast Guard Inspector fully extends and retracts level wind arm hydraulic cylinder in a no-load condition the Contractor shall:

- Verify proper operation of all controls.
- Verify no unusual vibration, noise, or binding.

20.3.2 Static load test. The Contractor shall:

- Using an external lifting device, suspend the static load test weight specified in the work item from the winch wire rope assembly and hold for a minimum of 10 minutes.
- Verify the winch brake holds without slipping.
- Remove the test weight.
- Verify no permanent deformation or damage to any components.

20.3.2.1 Static load test for level wind arm assemblies. Perform the following on winches that have a level wind arm assembly installed. While performing static load test, the Contractor shall:

- Verify that the level wind arm hydraulic cylinder does not drift.
- Verify no permanent deformation or damage to any components.

20.3.3 Rated load test. While the Coast Guard Inspector operates the winch, raising and lowering the rated load specified in the work item a minimum range of 5 feet a minimum of 10 complete cycles, starting and stopping the winch at least twice in each direction, the Contractor shall verify the following:

- The winch lifts the rated load at rated speed.
- The brake stops and holds the rated load without slipping.
- No permanent deformation or damage to any components.
- Proper operation of all controls and sensors.
- No unusual vibration, noise, or binding.

20.4 Booms and cranes.

NOTICE!

During no-load operations ensure sufficient tension is kept on wire ropes to prevent improper wrapping on hoist drum.

20.4.1 No-load operational test. While the Coast Guard Inspector operates each actuator associated with the boom or crane in both directions a minimum of 2 minutes by topping the boom, rotating the boom, and operating each associated winch, the Contractor shall verify that:

- All controls and sensors are operating properly.
- No unusual vibration or noise is emitted from any component (e.g., winch, actuator, shaft assembly, pin assembly, etc..) and there is no binding or misalignment.
- Proper setting and release of each brake.

20.4.2 Static load test. The Contractor shall:

- Using an external lifting device, suspend the static load test weight specified in the work item for each hoist from the applicable wire rope assembly and hold for a minimum of 10 minutes.
- Verify that each hoist brake holds without slipping.
- Remove the test weight.
- Verify no permanent deformation or damage to any components.

20.4.3 Dynamic load test. While the Coast Guard inspector raises and lowers each dynamic load specified in the work item from the applicable hoist a minimum of three complete cycles and through as wide a range as practicable; rotates each dynamic load through as wide a range as practicable a minimum of three complete cycles; and tops each dynamic load through as wide a range as practicable; or as specified in the task description, a minimum of three complete cycles starting and stopping each actuator at least twice in each direction every cycle, the Contractor shall verify the following as applicable:

- Each actuator lifts or rotates the dynamic load.
- Each brake stops and holds the dynamic load without slipping.
- No permanent deformation, damage to, or overheating of any components.
- Proper operation of all controls and sensors.
- No unusual vibration or noise is emitted from any component (e.g., winch, actuator, shaft assembly, pin assembly, etc...) and there is no binding or misalignment.
- Verify no leakage from hydraulic components.

20.4.4 Rated load test. While the Coast Guard inspector raises and lowers each rated test load specified in the work item from the applicable hoist a minimum of 10 complete cycles and through as wide a range as practicable; rotates each rated load through as wide a range as practicable a minimum of 10 complete cycles; and tops each rated load through as wide a range as practicable; or as specified in the task description, a minimum of 10 complete cycles, starting and stopping each actuator at least twice in each direction every cycle, the Contractor shall verify the following as applicable:

- Each actuator lifts or rotates the rated load at rated speed.
- Each brake stops and holds the rated load without slipping.
- No permanent deformation, damage to, or overheating of any components.
- Proper operation of all controls and sensors.

- No unusual vibration or noise is emitted from any component (e.g., winch, actuator, shaft assembly, pin assembly, etc..) and there is no binding or misalignment
- Verify no leakage from hydraulic components.

20.5 Anchor Windlass.

20.5.1 Capstan operational test. The Contractor shall test each capstan associated with the anchor windlass system as specified below.

20.5.2 Wildcat operational test. With the vessel waterborne, and while the Coast Guard Inspector raises and lowers each anchor individually from the hawse pipe to the channel floor a total of three complete cycles, stopping each anchor in the middle of travel at least once each cycle; operates each pawl and pelican hook; and cycles each mechanical band brake twice as applicable, the Contractor shall:

- Verify that no unusual vibration or noise is emitted from any component (e.g., winch, actuator, each shaft assembly, each pin assembly, etc..) and there is no binding or misalignment.
- Verify that wildcat lifts the rated load at rated speed.
- Verify that the load is held and controlled by each hydraulic disc brake and each operates satisfactorily.
- Verify the load is held and controlled by each mechanical band brake and each operates satisfactorily.
- Verify no leakage from hydraulic components.

20.6 Capstans. With the vessel waterborne and while the Coast Guard Inspector warps the vessel forward a minimum of 30 feet, then aft a minimum of 30 feet three complete cycles, the Contractor shall:

- Verify that the capstan will warp the vessel.
- Verify proper operation of all controls and sensors.
- Verify the brake sets and releases properly.
- Verify no permanent deformation, damage to, or overheating of any components.

20.7 Davits.

20.7.1 Single point davits.

NOTICE!

During no-load operations ensure sufficient tension is kept on wire ropes to prevent improper wrapping on hoist drum.

20.7.1.1 No-load operational test. While the Coast Guard Inspector operates each actuator associated with the davit in both directions a minimum of two minutes by topping the boom (if applicable), rotating the boom, and operating the hoist, the Contractor shall verify:

- All controls and sensors are operating properly.
- No unusual vibration or noise is emitted from any component (e.g., winch, actuator, shaft assembly, pin assembly, etc...) and there is no binding or misalignment.
- Proper setting and release of each brake.

20.7.1.2 Static load test. The Contractor shall:

- Using an external lifting device, suspend the static load test weight specified in the work item from the davit wire rope assembly and hold for a minimum of 10 minutes.
- Verify that the davit hoist brake holds without slipping.
- Remove the test weight from the davit wire rope assembly.
- Verify no permanent deformation or damage to any components.
- Verify no leakage from hydraulic components.

20.7.1.3 Dynamic load test. While the Coast Guard inspector raises, lowers, and rotates the dynamic load specified in the work item a minimum of three complete cycles and through as wide a range as practicable, and if applicable, tops the dynamic load through as wide a range as practicable a minimum of 3 complete cycles starting and stopping each actuator at least twice in each direction every cycle, the Contractor shall verify the following as applicable:

- Each actuator lifts or rotates the dynamic load.

- Each brake stops and holds the dynamic load without slipping.
- No permanent deformation, damage to, or overheating of any components.
- Proper operation of all controls and sensors.
- No unusual vibration or noise is emitted from any component (e.g., winch, actuator, shaft assembly, pin assembly, etc..) and there is no binding or misalignment.
- Verify no leakage from hydraulic components.

20.7.1.4 Rated load test. While the Coast Guard inspector raises, lowers, rotates, and if applicable tops the rated load specified in the work item a minimum of 10 complete cycles and through as wide a range as practicable, starting and stopping each actuator at least twice in each direction every cycle, the Contractor shall verify the following as applicable:

- Each actuator lifts or rotates the rated load at rated speed.
- Each brake stops and holds the rated load without slipping.
- No permanent deformation, damage to, or overheating of any components.
- Proper operation of all controls and sensors.
- No unusual vibration or noise is emitted from any component (e.g., winch, actuator, shaft assembly, pin assembly, etc..) and there is no binding or misalignment.
- Verify no leakage from hydraulic components.

20.7.2 Dual point davits.

NOTICE!

During no-load operations ensure sufficient tension is kept on wire ropes to prevent improper wrapping on hoist drum.

20.7.2.1 No-load operational test. While the Coast Guard Inspector operates each actuator associated with the davit in both directions a minimum of 2 minutes by extending and retracting the davit arms and operating the hoist(s), the Contractor shall verify:

- All controls and sensors are operating properly.
- No unusual vibration or noise is emitted from any component (e.g., winch, actuator, shaft assembly, pin assembly, etc...) and there is no binding or misalignment.
- Proper setting and release of each brake.

20.7.2.2 Static load test. The Contractor shall:

- Using an external lifting device, suspend the static load test weights specified in the work item from each wire rope assembly and hold for a minimum of 10 minutes.
- Verify that the hoist brake holds without slipping.
- Remove the test weight.
- Verify no permanent deformation or damage to any components.
- Verify no leakage from hydraulic components.

20.7.2.3 Dynamic load test. While the Coast Guard inspector raises, lowers, extends and retracts the dynamic load test weights specified in the work item a minimum of 3 complete cycles and through as wide a range as practicable starting and stopping each actuator at least twice in each direction every cycle, the Contractor shall verify the following, as applicable:

- Each actuator lifts or rotates the dynamic load test weights.
- Each brake stops and holds the dynamic load test weights without slipping.
- No permanent deformation, damage to, or overheating of any components.
- Proper operation of all controls and sensors.
- No unusual vibration or noise is emitted from any component (e.g., winch, actuator, shaft assembly, pin assembly, etc...) and there is no binding or misalignment.
- Verify no leakage from hydraulic components.

20.7.2.4 Rated load test. While the Coast Guard inspector raises, lowers, extends, and retracts the rated load test weights specified in the work item a minimum of 10 complete cycles and through as wide a range as practicable, starting and stopping each actuator at least twice in each direction every cycle, the Contractor shall verify the following, as applicable:

- Each actuator lifts or rotates the rated load test weights at rated speed.
- Each brake stops and holds the rated load without slipping.
- No permanent deformation, damage to, or overheating of any components.
- Proper operation of all controls and sensors.
- No unusual vibration or noise is emitted from any component (e.g., winch, actuator, shaft assembly, pin assembly, etc..) and there is no binding or misalignment.
- Verify no leakage from hydraulic components.

20.8 Small boats. The Contractor shall test small boat lifting eyes and slings by performing the following as specified in the task description:

- Collect unit specific data associated with full outfit of the small boat: weight of personnel, weight of fuel, weight of cargo.
- Weigh the small boat to determine its actual weight.
- Perform calculations to determine the required test weight.
- Submit CFR listing the test weight value in pounds and all other data and calculations described above. If the required test weight value exceeds 150% of the rated load of the associated davit, note in the CFR.

WARNING!

If the EO/EPO determines that the hull weight of the boat exceeds 115% of the “new boat weight” specified in the system specifications or the task description, or if the maximum launch weight exceeds the working load limit of the davit then all further testing of the boat lifting eyes and slings will be suspended until EO/EPO contacts the cognizant MLC for instructions.

- After the COR has approved the test weight value and all other submitted calculations, the Contractor shall furnish multiple individual test weights whose combined weight shall equal the approved test weight value plus 0% minus 5%. The number of individual test weights shall be equal to or greater than the number of lifting points on the small boat. The test weights shall be fabricated from sand bags, water bags, or similar soft material or shall be placed on pads to prevent damage to the small boat.
- Determine the optimum arrangement for the test weights on the waterborne small boat and place the test weights accordingly.
- Arrange the test weights so that the tension caused by the added weight is distributed evenly on each strap of the lifting sling and as close to each lifting eye as practicable in conjunction with maximizing overall stability of the boat.
- Suspend the small boat from the lifting slings used during normal operations.
- Using an external lifting device, hoist and suspend the small boat just above the surface of the water and hold for a minimum of 10 minutes.
- Lower the small boat back into the water and verify no permanent deformation or damage to the small boat or the lifting sling. Remove the weights from the small boat and return it to normal operating condition.
Submit CFR.

20.9 Label plates. The Contractor shall remove the existing test label plate from the system and fabricate a new 3 inch by 5 inch label plate from 1/16" thick minimum anodized-hydrated aluminum sheet, using printed black lettering for the titles shown in figures B-1, B-2, and B-3 below, as applicable. Stamp, engrave, etch, or print the test information onto the label plate: system name, contractor name, date of test, and the weight values specified in the work item. Affix in plain view the label plate onto the equipment that was tested using a suitable adhesive.

Figure B-1

Operational Test

System _____

Contractor _____

Date _____

Figure B-2

Operational and Weight Test

System _____

Contractor _____

Date _____

Static Load Test Weight _____

Dynamic Load Test Weight _____

Rated Load Test Weight _____

Figure B-3

Operational and Weight Test System	_____
Contractor	_____
Date	_____
Aux Static Load Test Weight	_____
Aux Dynamic Load Test Weight	_____
Aux Rated Load Test Weight	_____
Main Static Load Test Weight	_____
Main Dynamic Load Test Weight	_____
Main Rated Load Test Weight	_____

30. QUALITY ASSURANCE

No additional requirements.

40. NOTES

None.

APPENDIX C

Hydraulic Systems

10. SCOPE

10.1 Scope. This appendix describes the requirements for repairing and testing hydraulic systems and components onboard Coast Guard vessels.

10.2 Requirements. The following paragraphs specify requirements for the associated hydraulic component or task:

TITLE	PARAGRAPH
Fluids	20.1
Hose assemblies	20.2
Piping and tubing	20.3
Valves and manifolds	20.4
Gages	20.5
Gas charged accumulators	20.6
Heat exchangers and fluid coolers	20.7
Systems	20.8

20. REQUIREMENTS

20.1 Fluids. The Contractor shall conform to the following requirements when working with hydraulic fluids.

20.1.1 Renewal. When "Renew" is specified in the task description:

- Drain and dispose of the existing system hydraulic fluids.
- Furnish hydraulic fluids that meet the quantity, type, grade, viscosity, and all other material criteria as specified in the system specifications or in the task description.
- Filter the new hydraulic fluids through one or more three-micron absolute, non-bypass type filters designed specifically for filtering oils and other lubricants.

- Sample and test the new, filtered fluids as specified in paragraph 20.1.3.1 (Fluid sample tests) and submit a CFR prior to installing into the system.

20.1.2 Filtering. When "Filter" is specified in the task description:

- Furnish a filtering cart/rig equipped with a three-micron absolute filter, a water separator, and a pressure differential gage across the filter element assembly.
- Connect the supply and discharge lines of the filtering cart/rig to the hydraulic system as specified in the system specifications or the task description.

NOTICE!

The best connection points will minimize filtering time and will maximize the rate at which previously unfiltered fluid passes through the rig/cart. Select points at opposite ends of the reservoir if possible.

- Continuously circulate system hydraulic fluids through the filtering cart/rig for the period specified in the table below based on reservoir size and filter cart/rig pump capacity. Be aware that the Coast Guard Inspector shall be allowed to cycle the system actuators four separate times as described in the notice below during the filtering process.

NOTICE!

To dislodge and suspend particulate contamination and to heat the fluid to a maximum, constant, steady state temperature, the Coast Guard inspector will cycle all actuators associated with the hydraulic system for a minimum of 20 minutes at the start of the filtering process. The Coast Guard Inspector will repeat this process a minimum of three additional times, equally spaced through the filtering period.

- Renew the filter element a minimum of four times equally spaced through the filtering period or every eight hours, whichever is less, and whenever the pressure differential across the filter element exceeds the filter element manufacturer's specifications.

- Sample and test the system fluids as specified in Table C-1 below, once at the mid point of the filtering period and once again at the end of the filtering period. Submit a CFR after receiving the test results from both samples. If a Change Request has been authorized and released by the KO based on the test results, continue filtering as specified.

Table C-1

RESERVOIR SIZE (GAL)	MINIMUM FILTERING PERIODS FILTER CART/RIG PUMP FLOW CAPACITY (GPM)				
	5	10	15	20	25
	100	16 hrs	8 hrs	5 hrs	4 hrs
200	32 hrs	16 hrs	11 hrs	8 hrs	6 hrs
300	48 hrs	24 hrs	16 hrs	12 hrs	10 hrs
400	64 hrs	32 hrs	21 hrs	16 hrs	13 hrs
500	80 hrs	40 hrs	27 hrs	20 hrs	16 hrs
600	96 hrs	48 hrs	32 hrs	24 hrs	19 hrs
700	112 hrs	56 hrs	37 hrs	28 hrs	22 hrs
800	128 hrs	64 hrs	43 hrs	32 hrs	26 hrs

20.1.3 Sample and test. When "Sample and Test" is specified in the task description:

- Allow the Coast Guard Inspector to cycle the system actuators as described in the notice below.

NOTICE!

Prior to sampling hydraulic fluid in a system, the Coast Guard inspector will cycle all actuators associated with the subject hydraulic system for a minimum of 20 minutes, and until the system fluid reaches a maximum, constant, steady-state temperature, to dislodge and suspend particulate contamination.

- Take at least one fluid sample from the hydraulic system as described in the notice below immediately following system warm-up and actuator cycling. Take other samples from other points in the system as specified in the task description. Submit each sample to an independent laboratory for analysis, in accordance with all fluid sample test requirements specified below.

NOTICE!

As a general rule, a volume of oil equivalent to one to two times the volume of oil contained in the sampling line and valve should be displaced before taking the sample. The preferred sampling point is immediately upstream of a return line filter. In the absence of sampling or vent valves, use a pump discharge gage line. Approximately one quart should be drained from gage lines prior to taking a sample. Avoid sampling from a reservoir.

- Submit a CFR including laboratory contamination report.

20.1.3.1 Fluid sample tests.

20.1.3.1.1 Sample containers. Sample containers shall be made of glass or plastic. The interior surfaces of sample containers shall be cleanliness Grade A. Use one 8-ounce (250-mL) container per sample.

20.1.3.1.2 Contamination tests and reports. Samples shall be tested for water and particulate contamination by a chemical analysis laboratory using optical Automatic Particle Counters (APC). Test reports shall describe a level of contamination by solid particles in accordance with ISO 4406 and the level of water contamination in percent by volume or parts per million for each sample taken.

20.1.3.2 Portable testing apparatuses. Portable particulate and water content counters are acceptable for intermediate testing provided that calibration certification reports are submitted to the COR. Final contamination test results shall be performed and documented by a chemical analysis laboratory as specified above.

20.1.4 Acceptable contamination level. Unless otherwise specified in the work item or in the system specifications the maximum acceptable levels of contamination are:

- A particulate count of -/18/15 in accordance with ISO 4406 (max 2500 particles per milliliter = 6 μ m, max 320 particles per milliliter = 14 μ m).
- A water content of 500 parts per million (ppm) (0.05% by volume).

NOTICE!

The max contamination levels specified above establish a minimum standard when no max contamination level for the system is specified in a work item or the referenced system specifications. More stringent requirements may exist in the work item or in the system specifications and shall take precedent.

20.2 Hose assemblies. The Contractor shall conform to the following for hydraulic hose assemblies:

20.2.1 Renewal. When "Renew" is specified in the task description:

- Disconnect, remove, and dispose of each specified hose assembly.
- Validate each hose's physical properties (e.g., size, length, material, etc.) against the vessel hose log data.
- Fabricate new hose assemblies in accordance with the system specifications and as detailed below.
- Pressure test each new hose assembly.
- Fabricate and install a hose tag onto each new hose assembly.
- Flush each new hose assembly to remove all contaminants to achieve cleanliness Grade A prior to installation.
- While the Coast Guard Inspector energizes the system and cycles actuators, verify that all disturbed joints are leak free.
- Submit a "hose log data form" as specified below for each new hose assembly.

20.2.1.1 Hose material and dimensional requirements. Hose assemblies shall conform to SAE J1942-1. All material and mechanical properties of a new hose shall be equivalent to the properties of the hose being renewed, which include but are not limited to pressure rating, burst pressure, minimum bend radius, jacket durability, and fluid compatibility. The inner diameter dimension of a new hose shall be equal to the inner diameter of the hose being renewed.

20.2.1.2 End fitting material and dimensional requirements. New end fittings shall be:

- Crimp type.
- Fabricated from 316 stainless steel where the hose assembly will be in the weather or where condensation develops.
- Fabricated from Monel if the hose assembly fittings being renewed are Monel or other nickel alloys.


- Pressure rated equal to or greater than the new mating hose.
- Compatible with the connection points in the hydraulic system.

20.2.1.3 Pressure testing requirements. Pressure test each new hose assembly to twice its rated working pressure, or twice the design pressure of the hydraulic system, whichever is less. Hold this pressure for 5 minutes. Leakage or permanent deformation is not allowed. Pressure test media shall be either water or a hydraulic fluid compatible with the system fluid. If water is used, the hose assembly shall be drained after the test and blown dry with clean air.

20.2.1.4 Tagging requirements. Tag each new hose assembly as follows:

- Determine the service life date for each hose assembly.
 - For hose assemblies exposed to weather or condensation add five years to the date the new hose assembly was pressure tested if the hose is not specifically designed for these conditions.
 - For all other hose assemblies add eight years to the date the hose assembly was pressure tested.
- Permanently stamp, engrave, or etch the following on a metal hose tag as shown in Figure C-1.
 - "Hose Log Item Number". This is the new serial number on the "Hose Log Data Form" provided by the unit.
 - "Hydrostatic Test Pressure". This is the test pressure in pounds per square inch (psi).
 - "Date". This is the date of the test in the format (DD/MM/YY).
 - "Service Life Date". This is the date for hose renewal in the format "xQyy" (where "xQ" is the quarter and "yy" is the year, e.g., 12 December 2008 shall be recorded 4Q08).

Figure C-1

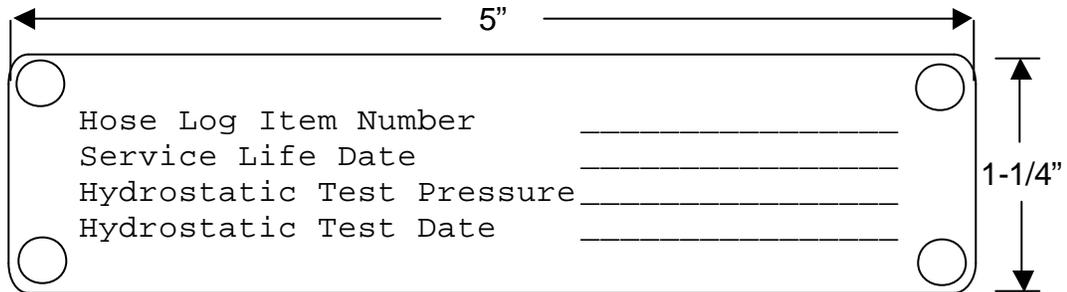

- o Attach each tag to the hose assembly near an end fitting using self-clinching nylon straps or metal wire that will not damage the hose.

20.2.1.5 Hose log data form requirements. After the COR provides the "Hose Log Data Form" with "UNIT FURNISHED DATA" for each new hose assembly, the Contractor shall provide the new hose information designated by a "*" on the form and submit to COR. Sample form C-1 "Hose Log Data Form" is provided in paragraph 40.3 (Hose log data form).

20.3 Piping and tubing. The Contractor shall conform to the following requirements when working with hydraulic piping or tubing:

20.3.1 Renewal or modification. When "Renew" or "Modify" is specified in the task description:

- Renew or modify the specified pipe or tube and all associated fittings as shown on all applicable installation drawings. Where arrangement specifications are silent, arrange the pipe or tube as specified below.
- Pressure test piping or tubing and clean as specified below.

20.3.2 Arrangement. When arrangement drawings and details are not specified, or when configurations cannot be maintained when renewing or modifying existing arrangements, all material and mechanical properties of new or modified component arrangements shall:

- Meet the properties of the components being renewed or modified, which include but are not limited to base material, pressure rating, and burst pressure. Inner diameter dimensions that affect flow must be maintained.
- Minimize the number of new piping joints through the maximum application of pipe bends, with a minimum radius of 5 outside diameters of the new pipe or tube. Use of flanged, threaded union, or similar takedown joints shall be minimized.
- Locate takedown joints away from bends or offsets where they are least affected by thermal expansion or other external loadings.
- Mechanically attached fittings (e.g., LOCRING or equivalent) are authorized for 2-1/2 inch inside diameter and smaller pipe and tube.
- Install rigid pipe hangers in accordance with MSS SP-69 and MSS SP-89 in accordance with Table C-2 below.

Table C-2

NOMINAL PIPE OR TUBE SIZE (INCHES)	MAXIMUM SPACING (FEET)
1-1/4 and below	7
1-1/2	9
2	10
2-1/2	11
3	12
3-1/2	13
4	14

20.3.3 Cleanliness. All internal surfaces of new, modified, or disturbed pipe or tube shall be cleanliness Grade A.

20.3.4 Pressure testing. Pressure test new modified or piping or tubing in accordance with Std Spec 0740_STD, Appendix C. System pumps and relief valves shall not be used to perform testing.

20.4 Valves and manifolds. The Contractor shall conform to the following requirements when working with hydraulic valves and manifolds:

20.4.1 Renewal. When "Renew" of is specified in the task description for a valve or manifold:

- Remove and dispose of the entire assembly, including all attached electrical actuators and sensors as applicable.
- When not provided Government-furnished property, furnish and install a new assembly or component. If a pressure control valve is part of the assembly, bench set the relief pressure as specified below or set during system grooming.
- Renew all associated mounting fasteners in accordance with the system specifications.

20.4.2 Overhaul. When "Overhaul" of a valve or manifold is specified in the task description, perform the following as applicable in accordance with the system specifications.

- Inspect and test all solenoid assemblies and sensors associated with the valve or manifold and provide results in the CFR.
- Disassemble all solenoid assemblies, sensor assemblies, encoders assemblies, and all other electrical components associated with the valve or manifold, as applicable, and clean all surfaces including electrical contact points to cleanliness Grade A.
- Bench set and label pressure control valves as specified below.

20.4.2.1 Testing solenoid assemblies. Apply the rated voltage across the valve's electrical actuators to operationally cycle the valve. Verify there is no insulation degradation.

20.4.2.2 Testing electrical sensors. Actuate and read resistance across sensors, verifying they are in accordance with the system specifications. Verify there is no insulation degradation.

NOTICE!

Pressure control valves include but are not limited to system relief valves, counterbalance valves, brake valves, pump compensators, and any other pressure regulating or reducing valve.

20.4.3 Bench setting and tagging pressure control valves. Using a system compatible fluid vent the appropriate ports and adjust the valve in accordance with the system specifications or as specified in the task description, using a calibrated gage. Permanently stamp, engrave, or etch the information below on a new metal tag and attach it to the valve:

- Vessel name and hull number.
- Valve identification number.
- Valve lifting pressure or set pressure.
- Date valve was tested and set.
- Name of repair facility.

20.4.4 Setting and tagging pressure control valves in place. Set and tag the pressure control valve as described in paragraph 20.4.3 (Bench setting and tagging pressure control valves) except using system pump and fluid to apply pressure to the valve.

20.5 Gages. The Contractor shall conform to the following requirements when working with hydraulic gages:

20.5.1 Renewal. When "Renew" is specified in the task description:

- Remove and dispose of each specified gage.
- Furnish new gage(s) in accordance with the system specifications.
- Calibrate each new gage as specified in paragraph 20.5.2 (Calibration).
- Install each new gage in accordance with the system specifications.

20.5.2 Calibration. When "Calibrate" is specified in the task description:

- Remove each specified gage from the system.
- Calibrate each gage as specified in 20.5.2.2 (Gage Types) with a master gage conforming to paragraph 20.5.2.1 (Contractor's standard gage requirements).
- Attach a calibration cert to each gage as specified in paragraph 20.5.2.3 (Calibration certification).

- Submit a CFR listing each gage calibrated, with nomenclature, location, manufacturer, model, serial number, date of calibration, calibration laboratory, identification of person who performed calibration, and a traceability statement. After approval of a change request by the KO, renew or repair failed gages.
- Install each gage in accordance with the system specifications.

20.5.2.1 Contractor's master gage requirements. Utilize a master gage whose calibration certification is traceable to an accuracy four times greater than the instrument to be calibrated. Master gages used shall have certificates attesting the date, accuracy, and environmental or other conditions under which the furnished results were obtained.

20.5.2.2 Gages types.

20.5.2.2.1 Dial type pressure gages. Accuracy of pressure gages with dial diameters 3.5 inches and larger shall be within 1 percent accuracy, pressure gages with dial diameters between 3.5 inches and 2 inches shall be within 3 percent accuracy, and dial diameters 2 inches and less shall be within 5% accuracy.

20.5.2.2.2 Dial type thermometers. Accuracy of all direct indicating, bi-metallic, or remote gas filled bulb thermometers shall be within 2% accuracy.

20.5.2.2.3 All other types of gages. Accuracy of all other types of gages shall be as specified in the task description or the system specifications.

20.5.2.3 Calibration certification. Clearly label the following data on a calibration certification sticker and affix it to each gage:

- Date calibrated.
- Due date (add 12 months to date calibrated).
- Calibration laboratory.
- Initials or code of person performing calibration.

20.6 Gas-charged accumulators. When "Overhaul and Inspect", "Overhaul, Inspect", "Service and Inspect", "Service, Inspect", or "Renew" is specified in a hydraulic gas-charged accumulator's task description, after performing all other

specified work, charge the accumulator with an inert gas in accordance with the system specifications.

20.7 Heat exchangers and fluid coolers. The Contractor shall conform to the following requirements when working with hydraulic heat exchangers and hydraulic fluid coolers:

20.7.1 Overhaul. When "Overhaul and Inspect" or "Overhaul, Inspect" is specified in the task description, in addition to all other specified work:

- Do not use cleaning equipment or media that will damage the heat exchanger or cooler.
- Pressure test heat exchanger or cooler as specified below. Submit CFR for completed pressure test.

20.7.2 Heat exchanger or cooler pressure testing. Perform the following:

- Apply test pressure to the exterior tube walls equaling 125 percent of the working pressure of the tubes and hold for a minimum of 15 minutes. Visually inspect tubes for leaks.
- Apply test pressure to the interior tube walls equaling 125 percent of the working pressure of the tubes and hold for a minimum of 15 minutes. Visually inspect tubes for leaks.
- While maintaining the test pressure on the interior of the tubes, apply a test pressure of 125 percent of the shell's working pressure for a minimum of 15 minutes. Visually inspect shell for leaks.

20.8 Systems. The Contractor shall conform to the following requirements when working on entire hydraulic systems:

20.8.1 Flushing. When "Flush" is specified in the task description, remove contamination throughout the hydraulic system as specified below.

- Identify and overhaul (i.e., disassemble, inspect, clean, etc...) each component in the system that can be disassembled and cleaned (e.g., pumps, valves, motors, cylinders, etc...).
- Identify each piping run, tube run, hose assembly, etc... in the system that cannot be disassembled and cleaned. Break these down into distinct circuits that can be flushed using Contractor furnished flushing rig.

- Submit a written flushing plan to the COR that:
 - Lists all identified piping runs, tubing runs, hose assemblies, etc... in the system that cannot be disassembled and cleaned.
 - Lists each flushing circuit to clean all identified piping runs, tubing runs, hose assemblies, etc... and describe how each will be connected to a flushing rig.
 - Lists fluid flow rate in gallons per minute (GPM) for each flushing circuit to meet minimum flow rate specified below.
- After flushing plan approval by the COR, flush each circuit identified using Contractor furnished flushing rig. Refer to ASTM D4174 for guidance.
 - Maintain the temperature and flow rate in each circuit for a minimum of 12 hours.
 - Fluid entering each circuit shall meet or exceed the acceptable contamination level specified in paragraph 20.1.4 or as specified in the task description.
 - At the end of the 12 hour period sample and test the fluid exiting the circuit in accordance with paragraph 20.1.3.1. Submit CFR for the completed test.
 - If a Change Request has been authorized and released by the KO, continue flushing as described in the change request.
 - After flushing has been completed, reinstall removed components, renew filter elements and fluid in accordance with the system specifications.

20.8.1.1 Flushing fluid type requirements. Flushing fluid shall be a petroleum based fluid with kinematic viscosity of less than or equal to 35.2 cSt (mm² per sec) at 40° C (ISO viscosity grade 32 or less per ISO 3448).

20.8.1.2 Flushing fluid temperature requirements. Flushing fluid temperature shall be maintained between 150°F and 180°F.

20.8.1.3 Flushing fluid minimum flow rate requirements. The minimum flushing fluid flow rate for a pipe or tube run shall be equivalent to the flow rate required to maintain turbulent flow through the pipe or tube. Table C-3 lists minimum flushing fluid flow rates for various inner diameters of pipe or tube at required temperature range.

Table C-3

MINIMUM FLOW RATES
ISO 32 HYDRAULIC FLUID
(TO ACHIEVE TURBULENT FLOW)

NOM SCH 40 PIPE SIZE (INCHES)	PIPE OR TUBE ID (INCHES)	MIN FLOW RATE (GPM)	
		150°F CST ~ 22.6	180°F CST ~ 14.2
Up to 1/8	0.269 or less	8	5
>1/8 thru 1/4	0.270 - 0.364	10	7
>1/4 thru 3/8	0.365 - 0.493	14	9
>3/8 thru 1/2	0.494 - 0.622	18	11
>1/2 thru 3/4	0.623 - 0.824	24	15
>3/4 thru 1	0.825 - 1.049	30	19
>1 thru 1-1/4	1.050 - 1.380	39	25
>1-1/4 thru 1-1/2	1.381 - 1.610	46	29
>1-1/2 thru 2	1.611 - 2.067	59	38
>2 thru 2-1/2	2.068 - 2.469	71	45
>2-1/2 thru 3	2.470 - 3.068	88	56

30. QUALITY ASSURANCE

No additional requirements.

40. NOTES

40.1 System flushing notes. When the Contractor is required to perform hydraulic system cleaning a severe system contamination condition has been established and documented, and complete system cleaning has been economically justified.

40.2 Fluid contamination code conversion. NAS 1638 classifications can be converted to ISO 4066 codes using the following table.

ISO 4406 CODE	NEAREST NAS 1638 CLASS
-/23/20	-
-/22/19	-
-/21/18	12
-/20/17	11
-/19/16	10
-/18/15	9
-/17/14	8
-/16/13	7
-/15/12	6
-/14/11	5
-/13/10	4
-/12/9	3
-/11/8	2
-/10/7	1
-/9/6	0
-/8/5	00
-/7/4	-

40.3 Hose log data form. Sample "Hose Log Data Form" is provided on the following sheet.

FORM C-1. HOSE LOG DATA FORM

DATA DESCRIPTION	UNIT FURNISHED DATA	VENDOR FURNISHED DATA
Hose Serial Number		
System Designation		
Associated Assembly		
Item (Hose/Flex Couple/Exp Joint)		
Designation (Std/Non-Std/CBM)		
Compartment Number		
Ship Maintenance Div (Prop/Aux/Elec)		
MPC Number		
MPC Inspection Period (Months)		
Part Number (if applicable)		
NSN (if applicable)		
Construction (Syn Rubber/Teflon/Metal/Plastic)		
Replacement Periodicity (Months)		
ESWBS Code		
Drawing Ref # (if applicable)		
Tech Pub Ref # (if applicable)		
Remarks		
Special Notes		
Source of Supply (Vendor name)		*
Hose Brand		*
Hose Model #		*
Design Pressure (PSI, minimum)		*
Hose Diameter (inches)		*
Hose Assembly Length (inches)		*
Inlet Fitting Description		*
Inlet Fitting Part #		*
Outlet Fitting Description		*
Outlet Fitting Part #		*
Fabrication Date		*
Hydrostatic Test Date		*
Installation Date		
Inspection Date		
Cost Account (30/45)		

APPENDIX D

Deck Machinery Systems

10. SCOPE

10.1 Scope. This appendix describes requirements for the Contractor to perform all work on Coast Guard deck machinery systems.

10.2 Requirements. The following paragraphs specify requirements for the associated component or task:

TITLE	PARAGRAPH
Fastener assemblies	20.1
Wire rope assemblies	20.2
Brakes and clutches	20.3
Open gearing and gear reducers	20.4

20. REQUIREMENTS

20.1 Fastener assemblies. The Contractor shall conform to the following requirements when working with fastener assemblies:

20.1.1 Vital fastener assembly renewal. When "Renew" is specified in the task description, verify that the existing fastener installed complies with the system specifications. Install new vital fastener assemblies identical in type of head, nominal size, threads per inch, thread class, length of thread, overall length, material grade, material class, and all other dimensional and mechanical properties to those assemblies being renewed.

20.1.2 Anti-seize. Threaded surfaces of all new or disturbed fasteners installed in systems exposed to the weather shall be coated with a commercial anti-seize compound prior to reinstallation. The compound shall not contain lead or copper.

20.1.3 Vital fastener assembly checks. Torque all new and disturbed vital fastener assemblies in accordance with the system specifications or as specified in the work item.

20.1.4 Certified fasteners. When "Provide certified fasteners" is specified in the task description, submit certification to the COR stating:

- Two of the fasteners from each heat of steel have been tested to meet or exceed minimum strength and maximum hardness for the grade of fastener being renewed.
- A minimum average Charpy impact energy value of 30 ft-lbs (40.6 Joules) at zero degrees Fahrenheit obtained from three tests with no single test value less than 22 ft-lbs (29.8 Joules) was obtained from each fastener tested.

20.2 Wire rope assemblies. The Contractor shall conform to the following requirements when working with wire rope assemblies:

20.2.1 Renewal. When "Renew" is specified in the task description:

- Furnish and install a new wire rope assembly in accordance with the material construction specified below.
- Submit to COR documentation certifying the new wire rope assembly has been pull tested as specified below.
- Pressure lubricate new wire rope assembly prior to installation as specified below.
- Install running rigging under tension and verify proper wrapping on winch or hoist drum.
- Verify that wire rope assemblies installed on crane hoist and davit hoist drums are of adequate length as specified below.

20.2.1.1 Construction type and dimensions. New wire rope shall be equal in length, nominal diameter, construction, and acceptable breaking strength to the wire rope assembly being renewed. Unless otherwise specified in the task description or system specifications, furnish wire rope that conforms to Fed Spec RR-W-410, ASTM A1023, or API Specification 9A.

- For running rigging, furnish class 6x37, uncoated, independent wire rope core (IWRC), right regular lay (RRL) wire rope.
- For standing rigging furnish class 6x19, uncoated, independent wire rope core (IWRC), right regular lay (RRL) wire rope.

20.2.1.2 End fitting types. Install only one-hundred percent strength efficiency end fittings onto the wire rope in accordance with system specifications. Install only end fittings that are compatible with all existing lifting appliances. Install either poured spelter, poured resin, permanently swaged, or fiege type end fitting onto the wire rope as specified in the work item or system specifications. When end fitting type is not specified, Contractor shall use poured spelter type end fittings.

20.2.1.3 Pull tests and certification. Contractor shall provide documentation certifying the wire rope assembly has been pull tested to the tension specified in the work item prior to use. When pull test tension is not specified, Table D-1 shall be used for required pull test tension.

**Table D-1
6x19 and 6x37 IWRC RRL**

WIRE ROPE NOMINAL DIAMETER (INCHES)	PULL TEST TENSION IN POUNDS (40% OF THE ACCEPTABLE BREAKING STRENGTH)		
	IMPROVED PLOW STEEL (IPS) (UNCOATED)	EXTRA IMPROVED PLOW STEEL (EIPS OR XIPS) (UNCOATED)	EXTRA EXTRA IMPROVED PLOW STEEL (EEIPS OR XXIPS) (UNCOATED)
1/2	8,960 (+448 -0)	10,400 (+520 -0)	11,680 (+584 -0)
9/16	11,280 (+564 -0)	13,120 (+656 -0)	14,800 (+740 -0)
5/8	14,000 (+700 -0)	16,080 (+804 -0)	18,160 (+908 -0)
3/4	20,000 (+1000 -0)	22,960 (+1148 -0)	25,920 (+1296 -0)
7/8	26,960 (+1348 -0)	31,040 (+1558 -0)	35,040 (+1752 -0)
1	35,040 (+1752 -0)	40,320 (+2016 -0)	45,520 (+2,276 -0)
1-1/8	41,040 (+2,052 -0)	50,720 (+2536 -0)	57,200 (+2,860 -0)

20.2.1.4 Lubrication. Pressure lubricate new wire rope assemblies with lead-free grease specifically designed for use on wire ropes installed in salt water marine environments. The grease shall be compatible with pressure lubrication equipment.

NOTICE!

Environmentally friendly lubricants are preferred.

20.2.1.5 Crane and davit wire rope assembly post installation inspections. Verify the wire rope assembly is properly attached to the hoist or winch drum in accordance with the system specifications. Verify the winch drum is not overfilled with rope. While the Coast Guard inspector operates the machinery and lowers the hook to the position where during normal operations the maximum amount of wire rope is unwrapped from the drum, verify the minimum number of wraps specified in the system specifications are on the drum.

NOTICE!

The above inspection verifies that a wire rope assembly installed is of sufficient length. Typically, winch and hoist system specifications require a minimum of 2-1/2 to 5 wraps, or dead-ends, of wire rope on the drum when the wire rope is fully paid-out.

20.3 Brakes and clutches. The Contractor shall conform to the following requirements when working with brakes and clutches:

20.3.1 Friction disc renewal. Contractor shall renew friction discs when "Service" or "Overhaul" is specified in the task description for a brake or clutch, in accordance with the system specifications or as specified in task description.

20.3.2 Hydraulically operated brakes and clutches. Contractor shall verify air is removed from pistons, cylinders, and hoses or tubes leading to new, overhauled, serviced, or disturbed hydraulically operated brakes and clutches prior to placing them back in service.

20.4 Open gearing and gear reducers. The Contractor shall conform to the following requirements when working with open gearing and gear reducers:

20.4.1 Open gearing lubrication. When lubricant is not specified in the task description or system specifications, Contractor shall use a lubricant conforming to MIL-PRF-18458.

20.4.2 Gear reducer case oil renewal. Contractor shall renew gear case oil when "Service" or "Overhaul" is specified in the task description for a gear reducer, in accordance with the system specifications or as specified in the task description.

20.4.3 Gear lube oil acceptable contamination level. Unless otherwise specified in the work item or system specifications maximum levels of contamination shall be:

NOTICE!

The max contamination levels specified below establish a minimum standard when no maximum contamination level for the system is specified in a work item or the system specifications. More stringent requirements may exist in the work item or in the system specifications and shall take precedent.

- A particulate count of -/19/16 in accordance with ISO 4406 (max 5000 particles per milliliter = 6µm, max 640 particles per milliliter = 14µm).
- A water content of 0.1% by volume.

30. QUALITY ASSURANCE

No additional requirements.

40. NOTES

None.