

**THIS CARD IS MAINTAINED TO PROVIDE PROCEDURAL
TEXT ONLY AND IS NOT REPORTED TO ACMS**

CEINUM RA-KB00-016

1 STANDARD ISSUE PERSONAL PROTECTIVE EQUIPMENT (PPE) INSPECT/ACCEPT

REFERENCES:

[COMDTINST M10470.10 \(series\)](#) Rescue and Survival Systems Manual Chapter 3
Form AF-538, Personal Clothing and Equipment Record
Form DD-1149 Requisition and Invoice/Shipping Document
Ready Service Locker Inventory Log
Standard Issue PPE Maintenance Record

TOOLS/TEST EQUIPMENT:

NONE

EXPENDABLES:

NONE

CONSUMABLES:

Marker, Tube Type, P/N: 7520-00-973-1059, CAGE: 83421, NIIN: 009731059 (Or equivalent)

A GENERAL INSTRUCTIONS

1. Assign a serial number.

NOTE: The individual serial number is comprised of the first three letters of the member's last name followed by the last four digits of the member's employee identification number, (Example: SN John Smith, EMPLID 1234567, would be SMI4567). In service PPE not individually issued may be assigned a unit generated serial number. Individual serial number for issued standard and cold weather PPE will be the same.

- a. Assign an individual serial number if equipment will be issued to an individual.

NOTE: A ready service locker is a stockpile of shared gear and equipment that can be used by scheduled mission personnel during each mission – may be used to store returnable items that can be checked out by personnel who do not frequently wear the items, such as sector boarding team, inspections personnel, etc. All gear placed in service that is maintained in the ready service locker shall be labeled with a unit-generated serial number.

2. Use the following guidelines for member transfers:

- a. Members transferring to another unit which utilizes standard issue PPE.

Distribution Statement D: Distribution authorized to the DHS/CG/DoD and their contractors Administrative/Operational use, 06/16/15. Other requests shall be referred to the appropriate asset product line.

WARNING: This document contains technical data whose export is restricted by the Arms Export-Control Act (Title 22, U.S.C., Sec 2751, et. seq.) or the Export Administration Act of 1979, as amended, Title 50, U.S.C. App 2401 et. seq. Violations of these export laws are subject to severe criminal penalties. Disseminate in accordance with provisions of DoD Directive 5230.25.

DESTRUCTION NOTICE: For classified documents, follow the procedures in DoD 5200.22-M, National Industrial Security Program Operating Manual, Section 5-705 or DoD 5200.1-R, Information Security Program Regulation, Chapter VI, Section 7. For unclassified, limited documents, destroy by any method that will prevent disclosure of contents or reconstruction of the document.



- (1) Departing unit.
 - (a) Review members AF-538 with the member present to verify accuracy.
 - (b) Complete form DD-1149 Requisition and Invoice/Shipping Document.

NOTE: Standard and cold weather PPE may be shipped together.
 - (c) Unit ships, via trackable means, all PPE, member's AF-538 and appropriate copy of DD-1149 invoice to new unit.
 - (2) Receiving unit.
 - (a) Review the member's AF-538 with the member present to verify accuracy.
 - (b) Reissue PPE to member, noting any new equipment on the member's form AF-538.
 - (c) Complete acceptance inspection noting any new equipment on the members AF-538, (Refer to Steps [1 B 1.](#) through [1 B 7.](#)).
- b. Members transferring to a unit which does not utilize standard issue PPE.
- (1) Issuing unit reclaim all returnable PPE items for re-issue, (Refer to [COMDTINST M10470.10 \(series\)](#)).

B ACCEPTANCE INSPECTION

NOTE: Perform acceptance inspection upon initial issue; when a member transfers in from another unit, or when fitting members who will be using "Ready Service Locker" equipment.

NOTE: Once an item is issued, it shall only be taken out of service for maintenance, repair or unserviceable condition. Issued items shall not be removed from service for the purpose of seasonal storage if an item is issued to a member and is taken out of service and sent to a repair facility for maintenance or repair, a replacement item needs to be issued if the season dictates the need for it.

NOTE: Anti-exposure coveralls are not required to be issued at units assigned to Sectors Guam, Honolulu, Key West, Miami, and San Juan.

NOTE: Anti-exposure coveralls are not required to be issued if the member has been issued an authorized Maritime Cold Weather Suit System (MCWSS) or industrial dry suit.

1. Issue required PPE to the member, (Refer to [Table 1](#) and [Table 2](#)).

NOTE: If standard sized equipment does not provide the proper fit, and the manufacturer is unable to provide special sizing to meet personnel needs, units are authorized to purchase an alternative item that most closely meets the required salient characteristics, (Refer to [COMDTINST M10470.10 \(series\)](#)). Units shall make the following notation in the remarks section of the AF-538: "Due to sizing limitations, an alternative Item(s) has been issued in lieu of the Item required by the RSSM".

2. Inspect anti-exposure coveralls, if issued, (Refer to Steps [2 A 1.](#) through [2 A 3.](#)).



3. Inspect all remaining issued PPE, (Refer to Steps [3 A 1.](#) through [3 A 17.a.](#)).

NOTE: Gentex SOHAH helmets require custom fitting to the member.

- a. Fit Gentex SOHAH Helmet to member, if issued, (Refer to [Figure 1](#)).
- (1) Have member don helmet.
 - (2) Fasten nape, chin, and buckle straps until snug.
 - (3) Ensure the ends of the chin strap are attached to the pile fastener on the chin cup once adjusted.

WARNING

FOR IMPACT PROTECTION AND HELMET STABILITY, YOU MUST KEEP ALL PINK FOAM PADS INSIDE THE SIZING PADS AND ALL SIZING PADS PROPERLY INSTALLED IN THE HELMET WHEN THE HELMET IS WORN. REMOVE THE WHITE FOAM PADS ONLY WHERE NECESSARY TO ADJUST THE FIT.

- (4) Allow the helmet to settle on the head for a few minutes to allow the temperature sensitive pads to conform to the shape of the wearer's head.
- (5) Check the helmet on the wearer's head for the following:
 - (a) The front sizing pads should be just above the wearer's eyebrows.
 - 1) Remove 1-2 white foam pads, if needed, from each of the crown pads.
 - (b) The crown pad cover openings face the inside of the helmet.
- (6) Check helmet spacing around the wearer's head.
 - (a) Verify there is approximately 1/2 inch of space between the wearer's head and the helmet all the way around.
 - 1) Remove 1-2 white foam pads, if needed, from each rear pad cover.
- (7) Check member comfort level.
 - (a) Remove 1-2 white foam pads from each front pad cover, if needed.
- (8) Recheck helmet fit.

NOTE: Mango CEAN XT4 helmet is one size fits all.

- b. Verify member fit for Mango CEANXT4 helmet, if issued, (Refer to [Figure 2](#)).

4. Place serial number marking on the following equipment using permanent marker, P/N: 7520-00-973-1059:

NOTE: Individual serial number may be marked on either the inside or the outside of the zipper cover.

- a. Gear bag on zipper cover.
- b. Anti-exposure coveralls, if issued, under the entry zipper cover near the top.

NOTE: The use of label tape is authorized for labeling boat crew helmet.

- c. Boat crew helmet.

5. Record issuer and member document issuance or replacements on members form AF-538.
6. Document maintenance in the Standard Issue PPE Maintenance Record.
7. Document any discrepancies.



2 SEMI-ANNUAL STANDARD ISSUE PPE INSPECT/CLEAN

REFERENCES:

Form AF-538, Personal Clothing and Equipment Record
MPC [KB0107.0](#)
Ready Service Locker Inventory Log
Standard Issue PPE Maintenance Record

TOOLS/TEST EQUIPMENT:

Sail Needle, P/N: C022, CAGE: 0B590, NIIN: N/A (Or equivalent) (If required)

EXPENDABLES:

Anti-Exposure Coveralls (Refer to [Table 2](#)) (If required)
Cord, Fibrous, P/N: MIL-C-5040, CAGE: 81349, NIIN: 002402154 (Or equivalent) (If required)
Thread, P/N: A-A-59826, CAGE: 81348, NIIN: 005153367 (Or equivalent) (If required)

CONSUMABLES:

Cleaner, Wet/Dry Suit, P/N: 30130, CAGE: 1CAY9, NIIN: N/A (Or equivalent)
Leak Test Compound, P/N: MIL-PRF-25567, CAGE: 81349, NIIN: 006211820 (Or equivalent)
Marker, Tube Type, P/N: 7520-00-973-1059, CAGE: 83421, NIIN: 009731059 (Or equivalent) (If required)
Wax, Paraffin, Technical, P/N: A-A-59255, CAGE: 58536, NIIN: 002852044

A INSPECT ANTI-EXPOSURE COVERALLS

WARNING

VARIOUS STEPS IN THIS PROCEDURE EMPLOY ITEMS ON THE HAZARDOUS MATERIALS LIST. BEFORE EXECUTING THIS MPC, REFER TO THE APPLICABLE MSDS/SDS FOR FULL SAFETY AND HANDLING PROCEDURES.

NOTE: "Ready Service Locker" equipment shall be inventoried on a unit generated inventory log sheet.

NOTE: Anti-exposure coveralls are not required to be issued at units assigned to Sectors Guam, Honolulu, Key West, Miami, and San Juan.

NOTE: Anti-exposure coveralls are not required to be issued if the member has been issued an authorized Maritime Cold Weather Suit System (MCWSS) or industrial dry suit.

NOTE: Once an item is issued, it shall only be taken out of service for maintenance, repair, or unserviceable condition. If an item is issued to a member and is taken out of service and sent to a repair facility for maintenance or repair, a replacement item needs to be issued if the season dictates the need for it.

NOTE: Issued items shall not be removed from service for the purpose of seasonal storage.

1. Inspect anti-exposure coveralls.
 - a. Lay out the coveralls in a clean area free of obstructions.



- b. Inspect the coveralls for the following:

NOTE: Minor re-stitching of the Velcro patches may be completed using thread and sail needle.

- (1) Check for cuts, tears, seam separation, or loose stitching.
 - (a) Re-stitch coveralls if necessary using thread, P/N: A-A-59826, and sail needle.
- (2) Check entry/leg zippers for operability.
- (3) Check for required markings.
- (4) Check condition of installed reflective tape.

- c. Remove anti-exposure coveralls from service if any of the above items are found to be non-repairable.

NOTE: Ensure that anti-exposure coveralls are clean and dry prior to shipping for repair.

- (1) Send anti-exposure coveralls for repair if under warranty or if economical.
- (2) Replace anti-exposure coveralls if repair is not economical, (Refer to [Table 2](#)).

2. Inspect leak test head pillow.

- a. Remove inflatable head pillow bladder from cover.
- b. Inflate head pillow through the oral inflation tube until firm.

WARNING

AVOID EYE CONTACT, INHALATION, AND PROLONGED SKIN CONTACT WITH LEAK TEST COMPOUND. USE IN A WELL VENTILATED AREA. FAILURE TO COMPLY MAY RESULT IN PERSONAL INJURY.

- c. Apply leak test compound, P/N: MIL-PRF-25567, to the entire head pillow surface.
- d. Inspect head pillow for signs of leakage.
- e. Remove anti-exposure coveralls from service if head pillow leakage is found.

NOTE: Ensure that anti-exposure coveralls are clean and dry prior to shipping for repair.

- (1) Send anti-exposure coveralls for repair if under warranty or if economical.
- (2) Replace anti-exposure coveralls if repair is not economical, (Refer to [Table 2](#)).

- f. Deflate head pillow through inflation tube.
- g. Place deflated head pillow back into cover.
- h. Ensure oral inflation tube is pulled out, readily accessible.

3. Restore individual serial number marking under the entry zipper cover near the top, if faded or unreadable using permanent marker, P/N: 7520-00-973-1059.

B INSPECT/TEST SURVIVAL EQUIPMENT

NOTE: For ATON units that are not required to wear a boat crew survival vest, ensure a whistle and Personal Marker Light (PML) or strobe light is attached to the PFD using a 42 inch length of type 1 nylon cord secured with a bowline followed by an overhand knot.

1. Determine if PFD requires survival equipment to be attached.
 - a. Proceed to Step [2 C](#), if survival equipment is not required.



2. Inspect signal whistle, (Refer to MPC [KB0107.0](#)).
3. Inspect/test strobe light, (Refer to MPC [KB0107.0](#)).
4. Check for proper attachment of survival equipment to PFD.

NOTE: Finished length of line from knot to knot shall be 36 inches or greater.

- a. Attach signal whistle to anti-exposure coveralls, using type 1 nylon cord, P/N: MIL-C-5040.

NOTE: Sirius LED strobe lights are furnished with a manufacturer installed 42 inch lanyard. The manufacturer installed lanyard is acceptable for use until no longer serviceable.

- b. Attach strobe light to anti-exposure coveralls using type 1 nylon cord.

C CLEAN ANTI-EXPOSURE COVERALLS

1. Clean anti-exposure coveralls.

WARNING

AVOID EYE AND SKIN CONTACT WITH CLEANER. WASH EXPOSED SKIN THOROUGHLY AFTER HANDLING. FAILURE TO COMPLY MAY RESULT IN PERSONAL INJURY.

- a. Hand-wash the coveralls using cleaner, P/N: 30130.
- b. Rinse with freshwater.

CAUTION

DO NOT DRY ANTI-EXPOSURE COVERALLS USING A MACHINE DRYER, HEATER, OR IRON. HEAT WILL DAMAGE THE SUIT.

- c. Hang dry coveralls.

WARNING

AVOID EYE, SKIN CONTACT, AND INHALATION WITH PARRAFIN WAX. KEEP AWAY FROM OPEN FLAME, WAX CAN CATCH ON FIRE IF OVERHEATED. MELTED PARRAFIN WAX CAN CAUSE THERMAL BURNS. FUMES MAY CAUSE MILD IRRITATION TO NOSE, THROAT AND EYES. FAILURE TO COMPLY MAY RESULT IN PERSONAL INJURY.

- d. Lubricate zippers using paraffin wax, P/N: A-A-59255.
2. Record issuer and member document issuance or replacements on members form AF-538.
3. Document maintenance in the Standard Issue PPE Maintenance Record.
4. Document "Ready Service Locker" inventory inspection on Ready Service Locker Inventory Log.
5. Store, segregate, or dispose of hazardous materials IAW all applicable local, state, and federal regulations.
6. Document any discrepancies.



3 ANNUAL STANDARD ISSUE PPE INVENTORY INSPECT

REFERENCES:

[COMDTINST M10470.10 \(series\)](#) Rescue and Survival Systems Manual Chapter 3
Form AF-538, Personal Clothing and Equipment Record
Ready Service Locker Inventory Log
Standard Issue PPE Maintenance Record

TOOLS/TEST EQUIPMENT:

Sharpener, Knife, Hunting, P/N: REPRO400, CAGE: 3GZU3, NIIN: 015147779 (Or equivalent)

EXPENDABLES:

Fastener Tape, Pile, 2 inch, P/N: MIL-F-21840, CAGE: 81349, NIIN: 010331735 (If required)
Reflective Tape, Self Adhesive, 1 inch SOLAS, P/N: 276, CAGE: 64249, NIIN: N/A (If required)
Standard Issue PPE (Refer to [Table 2](#)) (If required)

CONSUMABLES:

Marker, Tube Type, P/N: 7520-00-973-1059, CAGE: 83421, NIIN: 009731059 (Or equivalent) (If required)
Seam Sealer and Outdoor Repair, Seam Grip, P/N: 630, CAGE: 64249, NIIN: N/A (If required)

A INSPECTION

WARNING

VARIOUS STEPS IN THIS PROCEDURE EMPLOY ITEMS ON THE HAZARDOUS MATERIALS LIST. BEFORE EXECUTING THIS MPC, REFER TO THE APPLICABLE MSDS/SDS FOR FULL SAFETY AND HANDLING PROCEDURES.

NOTE: Once an item is issued, it shall only be taken out of service for maintenance, repair, or unserviceable condition. If an item is issued to a member and is taken out of service and sent to a repair facility for maintenance or repair, a replacement item needs to be issued if the season dictates the need for it.

NOTE: Issued items shall not be removed from service for the purpose of seasonal storage.

1. Inventory issued standard PPE items as listed on members AF-538 form, Personal Clothing and Equipment Record, (Refer to [Table 1](#)).
 - a. Issue replacements for any missing items, (Refer to [Table 2](#)), (If required).
2. Inspect gear bag for the following:
 - a. Cuts or tears.
 - b. Holes.
 - c. Functional zipper.
3. Replace gear bag, (Refer to [Table 2](#)), (If required).

NOTE: Serial number may be marked on either the inside or the outside of the zipper cover.

4. Restore gear bag serial number marking if faded or unreadable using permanent marker, P/N: 7520-00-973-1059.



NOTE: Refer to boat forces website for boat crew helmet policy information: "<http://cgweb.comdt.uscg.mil/G-RCB/G-RCBhome.htm>".

5. Inspect boat crew helmet.
 - a. Inspect helmet shell for cracks, holes, warping, or de-lamination.
 - (1) Replace boat crew helmet if any of the above are noted, (Refer to [Table 2](#)).
 - b. Inspect helmet retention/chin strap assembly the following:
 - (1) Cuts, frays, or wear.
 - (2) Operable fasteners.
 - (3) Loose or missing fastening hardware.

NOTE: There is no torque value required, do not over tighten.

- (a) Tighten fastening hardware, (Gentex helmets), (If required).
6. Replace worn or damaged helmet retention components, (Refer to [Table 2](#)), (If required).

NOTE: Steps 3 A 6.a. through 3 A 6.c.(1) not applicable to boat crew safety helmets used by AtoN units (hardhats).

- a. Check sizing/comfort pads for tears, wear, or missing pads.

NOTE: For Gentex SOHAH Helmet, notate the number of white pads in use prior to removal; install replacement pads in the same manner as they were removed.

- (1) Replace sizing/comfort pads if damaged, worn or missing, (Refer to [Table 2](#)).
 - b. Check reflective tape, (non-ballistic helmet types).
 - (1) Replace missing or worn tape using 1 inch reflective tape, P/N: 276.
 - c. Check installed pile fastener tape, (non-ballistic helmet types).

NOTE: Pile tape sections for Mango CEAN XT4 are available cut to fit for the helmet. Refer to [Table 2](#) for Mango Helmet replacement parts.

- (1) Replace with a 2 x 3 inch section of pile fastener tape, P/N: MIL-F-21840, if worn or missing.

7. Restore helmet serial number marking, if faded or unreadable.
8. Inspect rain gear for the following:
 - a. Large tears or holes.
 - b. Inoperable fasteners.
 - c. Unserviceable reflective tape.



WARNING

AVOID EYE CONTACT, INHALATION, AND PROLONGED SKIN CONTACT WITH ADHESIVE. AVOID INGESTION. KEEP AWAY FROM ALL SOURCES OF IGNITION. WASH EXPOSED SKIN THOROUGHLY AFTER HANDLING. FAILURE TO COMPLY MAY RESULT IN PERSONAL INJURY.

NOTE: Apply seam grip to cover the tear or hole plus an additional 1/4 inch beyond; allow the repair to cure for at least 10 hours.

9. Repair small tears or holes, using seam sealer, P/N: 630.

NOTE: Check sizing and availability at the LSC website: <http://www.lifesavingsystems.com>.

10. Replace rain gear, (Refer to [Table 2](#)), (If required).

11. Inspect intermediate gloves for the following:

- a. Rips or holes.
- b. Seam separation.

12. Replace intermediate gloves, (Refer to [Table 2](#)), (If required).

13. Inspect boat crew goggles for the following:

- a. Check for cracked or scratched goggle lens.
 - (1) Replace lens if cracked or if scratched inhibiting vision, (Refer to [Table 2](#)).
- b. Check goggle strap for serviceability.
 - (1) Replace goggles if no replacement strap is listed.
 - (2) Replace goggle strap if cut, frayed or worn, (Refer to [Table 2](#)).

14. Inspect sunglasses for cracks or scratches.

- a. Replace sunglasses if cracked, broken or scratched inhibiting visibility, (Refer to [Table 2](#)).

15. Inspect temperate/wet weather boots.

NOTE: Check sizing and availability at UDC website (primary): <http://www.uscg.mil/uniform/SuperBoot.asp> or Belleville website (alternate): <http://www.bellevilleboot.com/customer-service/sizing.php>.

- a. Inspect the boot upper for tears or seam separation.
 - (1) Replace temperate/wet weather boots if boot upper is torn or separated, (Refer to [Table 2](#)).
- b. Inspect boot soles for wear.

NOTE: Replacement of boots is necessary if the sole is worn beyond the tread depth on the walking surface of the boot tread, feeling for any smooth areas; if any area on the walking surface larger than 4 square inches (2 x 2 inch) is worn; or if any other condition exists which compromises the protection which the boots are designed to provide.

- (1) Replace temperate/wet weather boots, (If required).



16. Inspect boat crew knife.
 - a. Replace boat crew knife if cracked or broken, (Refer to [Table 2](#)).
 - b. Sharpen knife blade using knife sharpener.

17. Inspect boat shoes, if issued.

*NOTE: Check sizing and availability at the UDC website:
<http://www.uscg.mil/uniform/MensShoesSocks.asp>.*

- a. Replace boat shoes if torn, ripped or if soles are worn beyond tread depth, (Refer to [Table 2](#)).
18. Perform anti-exposure coverall insp/clean, (Refer to [Item 2](#)).
19. Record inspector and member document inventory/inspection on page 2 of members form AF-538.
20. Record issuer and member document issuance or replacements on members form AF-538.
21. Record unit AOPS administrator document inventory in TMT.
22. Document maintenance in the Standard Issue PPE Maintenance Record.
23. Document "Ready Service Locker" inventory inspection on Ready Service Locker Inventory Log.
24. Document any discrepancies.

Item	Required Qty
**Gear Bag	1 ea
**Anti-Exposure Coveralls (Not required at Sectors Guam, Honolulu, Key West, Miami, or San Juan units) (Not required if member has been issued an authorized MCWSS or Industrial Dry Suit)	1 ea
Temperate/Wet Weather Boots	1 pr
Intermediate Gloves	1 pr
Boat Crew Goggles	1 ea
**Boat Crew Helmet	1 ea
**Boat Crew Knife	1 ea
**Rain Gear	1 se
Sunglasses	1 pr
Boat Shoes (Optional)	1 pr
** MAY BE PART OF READY SERVICE LOCKER EQUIPMENT	

STANDARD ISSUE PPE
Table 1



U.S. COAST GUARD
ASSET COMPUTERIZED MAINTENANCE SYSTEM

RESCUE AND ASSISTANCE
KB0026.0
REV'D 06/30/15

Gear Bag			
Kit Bag, Flyers	P/N: 8460-00-606-8366	CAGE: 83421	NIIN: 006068366 (Or equivalent)
Anti-Exposure Coveralls			
Mustang Deluxe Anti-Exposure Coverall	P/N: MS2175 22	CAGE: 1CJ91	NIIN: N/A
Stearns Challenger Worksuit	P/N: I580-CG	CAGE: 63806	NIIN: N/A
Boat Crew Helmet			
Gentex SOHAH Ballistic, Blue/Small (PWCS/MLE Units)	P/N: 04D11865-11J	CAGE: 97427	NIIN: N/A
Gentex SOHAH Ballistic, Blue/Med/Large (PWCS/MLE Units)	P/N: 04D11865-8J	CAGE: 97427	NIIN: N/A
Gentex SOHAH NON-Ballistic, Int. Orange/Small	P/N: 04D11865-4K	CAGE: 97427	NIIN: N/A
Gentex SOHAH NON-Ballistic, Int. Orange/Med/Large	P/N: 04D11865-1K	CAGE: 97427	NIIN: N/A
Mango CEAN XT4	P/N: USCG-CH-XT4	CAGE: 6CLS8	NIIN: N/A
Safety Helmet, White (AtoN Units)	P/N: ISEA/ANSI Z89.1	CAGE: 80204	NIIN: 009353139 (Or equivalent)
Safety Helmet, Yellow (AtoN Units)	P/N: ISEA/ANSI Z89.1	CAGE: 80204	NIIN: 009353140 (Or equivalent)
Safety Helmet, Blue (AtoN Units)	P/N: ISEA/ANSI Z89.1	CAGE: 80204	NIIN: 009353132 (Or equivalent)
Safety Helmet, Green (AtoN Units)	P/N: ISEA/ANSI Z89.1	CAGE: 80204	NIIN: 009353134 (Or equivalent)
Chin Strap (Safety Helmets)	P/N: ES-42	CAGE: 09729	NIIN: 010168034 (Or equivalent)
Below helmets are authorized for use by Heavy Weather/Surf Stations and National Motor Lifeboat School until replacement helmets are identified.			
Pro-Tec Alpha (Orange/Red)	P/N: 4811931RMIL	CAGE: Various	NIIN: N/A
Pro-Tec Ace (Orange/Red)	P/N: B000EYS798	CAGE: Various	NIIN: N/A
Helmet, Crash	P/N: 458	CAGE: 64249	NIIN: 015593400
Helmet Replacement Parts			
Gentex SOHAH Helmet Retention Assembly	P/N: 04D11861-1	CAGE: 97427	NIIN: N/A
Gentex SOHAH Helmet Sizing Pad Set	P/N: 04D11860-10	CAGE: 97427	NIIN: N/A
Mango Helmet Chin Strap Assembly Set	P/N: USCG-CS-2BS	CAGE: 6CLS8	NIIN: N/A
Mango Helmet Ear Pad Set	P/N: USCG-EP-2BG	CAGE: 6CLS8	NIIN: N/A
Mango Helmet Goggle Strap Retainer	P/N: USCG-GR-1BS	CAGE: 6CLS8	NIIN: N/A
Mango Helmet Head Adjustment (Run)	P/N: USCG-HA-1HS	CAGE: 6CLS8	NIIN: N/A
Mango Helmet Internal Comfort Padding	P/N: USCG-IP-3CC	CAGE: 6CLS8	NIIN: N/A
Mango Helmet Loop Patch, Exterior	P/N: USCG-EL-2HL	CAGE: 6CLS8	NIIN: N/A

STANDARD ISSUE PPE LIST

**Table 2
(Sheet 1 of 3)**



DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

Rain Gear			
Raintec, Tri-laminate (S-XXL)	P/N: 610-CG	CAGE: 64249	NIIN: N/A (Or equivalent)
SAR Life Foul Weather Jacket & Pant (S-XXL)	P/N: 25100-CG	CAGE: 756R8	NIIN: N/A (Or equivalent)
SAR Life Foul Weather Jacket (S-XXL)	P/N: 25100-JCG	CAGE: 756R8	NIIN: N/A (Or equivalent)
SAR Life Foul Weather Pant (S-XXL)	P/N: 25100-P	CAGE: 756R8	NIIN: N/A (Or equivalent)
Gloves, Intermediate			
Gill Championship, Long Finger, Men's XS-XXL	P/N: 7250	CAGE: KC631	NIIN: N/A (Or equivalent)
Gill Championship, Long Finger, Women's S-L	P/N: 7260	CAGE: KC631	NIIN: N/A (Or equivalent)
Gill Championship, Short Finger, XS-XXL	P/N: 7240	CAGE: KC631	NIIN: N/A (Or equivalent)
Gill Deckhand Gloves, Long Finger, XS-XL	P/N: 7050	CAGE: KC631	NIIN: N/A (Or equivalent)
Gill Deckhand, Short Finger XS-XL	P/N: 7040	CAGE: KC631	NIIN: N/A (Or equivalent)
Gill Championship, Long Finger, Women's S-L	P/N: 7260	CAGE: KC631	NIIN: N/A (Or equivalent)
Gill Deckhand Gloves, Long Finger, XS-XL	P/N: 7050	CAGE: KC631	NIIN: N/A (Or equivalent)
Outdoor Research Gripper Gloves, Full Finger, Men's S-XL	P/N: 70222	CAGE: 096Y0	NIIN: N/A (Or equivalent)
Outdoor Research Gripper Gloves, Full Finger, Women's S-L	P/N: 70217	CAGE: U0692	NIIN: N/A (Or equivalent)
Boat Crew Ballistic Goggles			
Goggles, Industrial (ESS Profile)	P/N: EP01BK-TSB	CAGE: 1NG39	NIIN: 015046222
Goggles, Industrial (Revision Desert Locust Black)	P/N: 4-0309-9500	CAGE: 30VZ5	NIIN: 015476227
Goggle Replacement Parts			
ESS Profile, Clear	P/N: 740-0113	CAGE: 1NG39	NIIN: N/A
ESS Profile, Smoke	P/N: 740-0119	CAGE: 1NG39	NIIN: N/A
Strap, ESS Profile	P/N: EP4-A	CAGE: 3GG46	NIIN: N/A
Lens, Goggles, Industrial (Revision Desert Locust, Clear)	P/N: 4-0331-9100	CAGE: 30VZ5	NIIN: 015476568
Lens, Goggles, Industrial (Revision Desert Locust, Smoke)	P/N: 4-0331-9200	CAGE: 30VZ5	NIIN: 015476567
Lens, Goggles, Industrial (Revision Desert Locust, Smoke)	P/N: 4-0331-9200	CAGE: 30VZ5	NIIN: 015476567
Ballistic Goggle Prescription Insert	P/N: P-2B	CAGE: 1NG39	NIIN: N/A (Or equivalent)
Sunglasses			
Spectacle Kit, Interchangeable Component (ESS Ice)	P/N: ESSICE-2	CAGE: 1NG39	NIIN: 015255085
Spectacle Kit, Eye Safety System (ESS Ice 2N)	P/N: ESSICE-2N	CAGE: 1NG39	NIIN: 015376143
Spectacle, Combo Pack, (UVEX XC)	P/N: S99-S3399-MIL3A	CAGE: 39SU9	NIIN: 015165361
Spectacle, Combo Pack, (UVEX Genesis)	P/N: S99-S3291-MIL	CAGE: 39SU9	NIIN: 015524131
Safety Glasses, (Revision Sawfly Eyewear)	P/N: 4-0076-9800	CAGE: 30VZ5	NIIN: 015274051
Spectacles, Industrial (Wiley X PT 1)	P/N: PT-1SC	CAGE: 0S7V7	NIIN: 015107853

STANDARD ISSUE PPE LIST

**Table 2
(Sheet 2 of 3)**




DESTRUCTION NOTICE - Destroy by any method that will prevent disclosure of contents or reconstruction of the document.

Boots, Temperate, Wet Weather			
Primary-Boots, Safety (Composite Toe)	P/N: BM/BF (Size)	CAGE: CG UDC	NIIN: N/A
Alternate-Belleville	P/N: 800ST	CAGE: 00P07	NIIN: N/A
Boat Crew Knife (Blade length not to exceed 4 inches)			
Benchmade	P/N: 550S	CAGE: 041N2	NIIN: 014510707 (Or equivalent)
Spyderco	P/N: C10SBK	CAGE: 0ZKZ2	NIIN: 014326186 (Or equivalent)
Boat Shoes (Optional)			
Shoes, Boat	P/N: BSM/BSF (Size)	CAGE: CG UDC	NIIN: N/A

STANDARD ISSUE PPE LIST


**Table 2
(Sheet 3 of 3)**



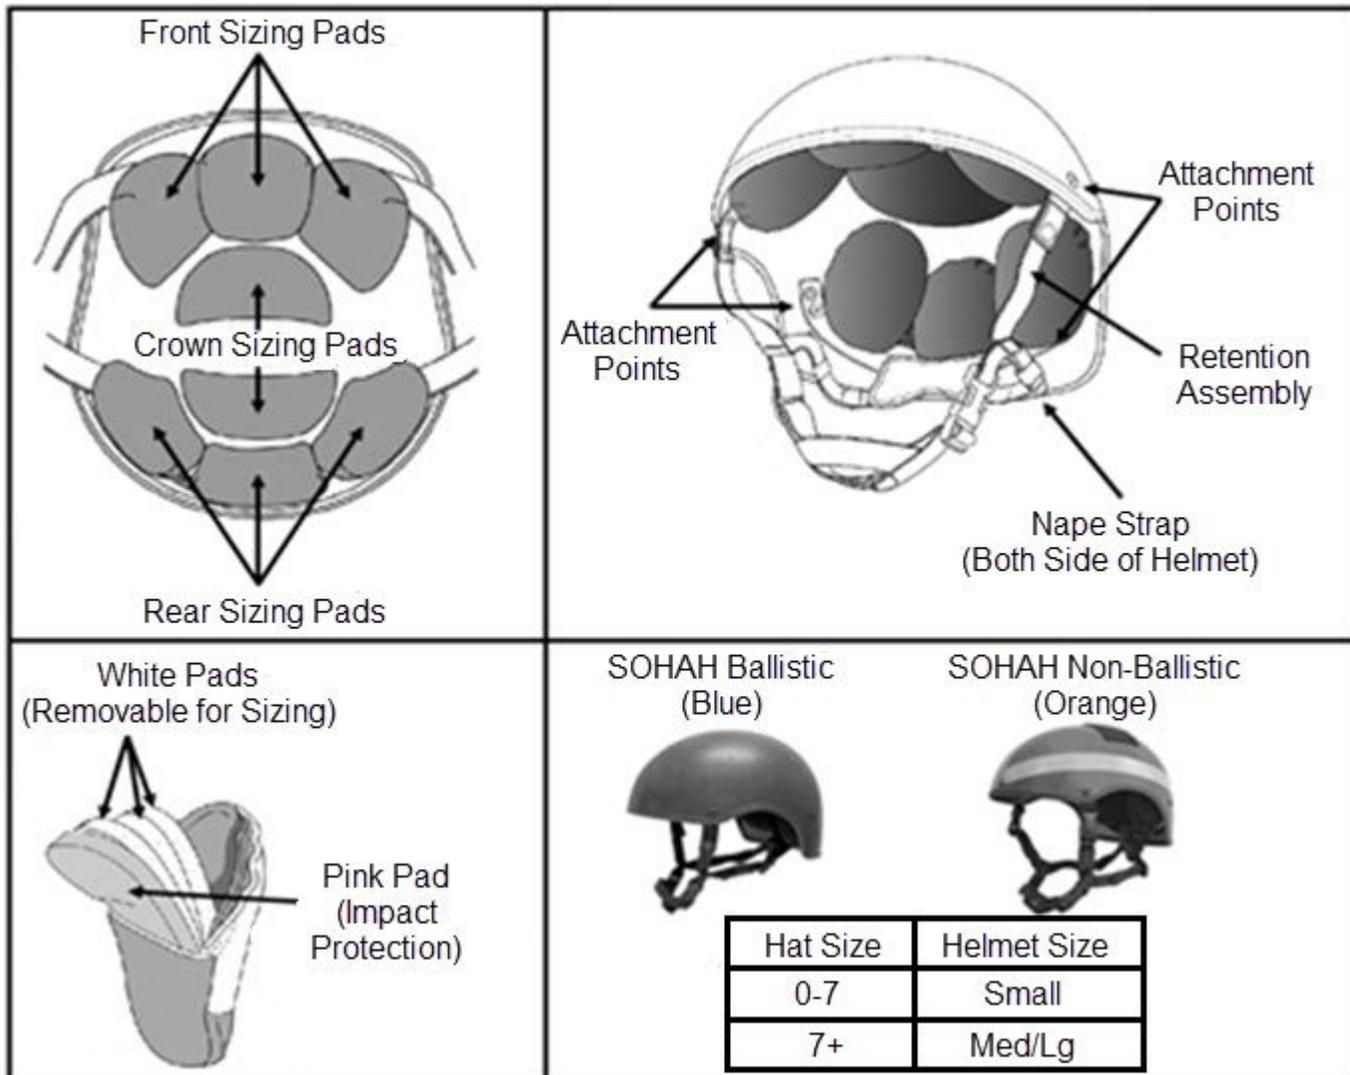

GENTEX BOAT CREW SOHAH HELMET
Figure 1



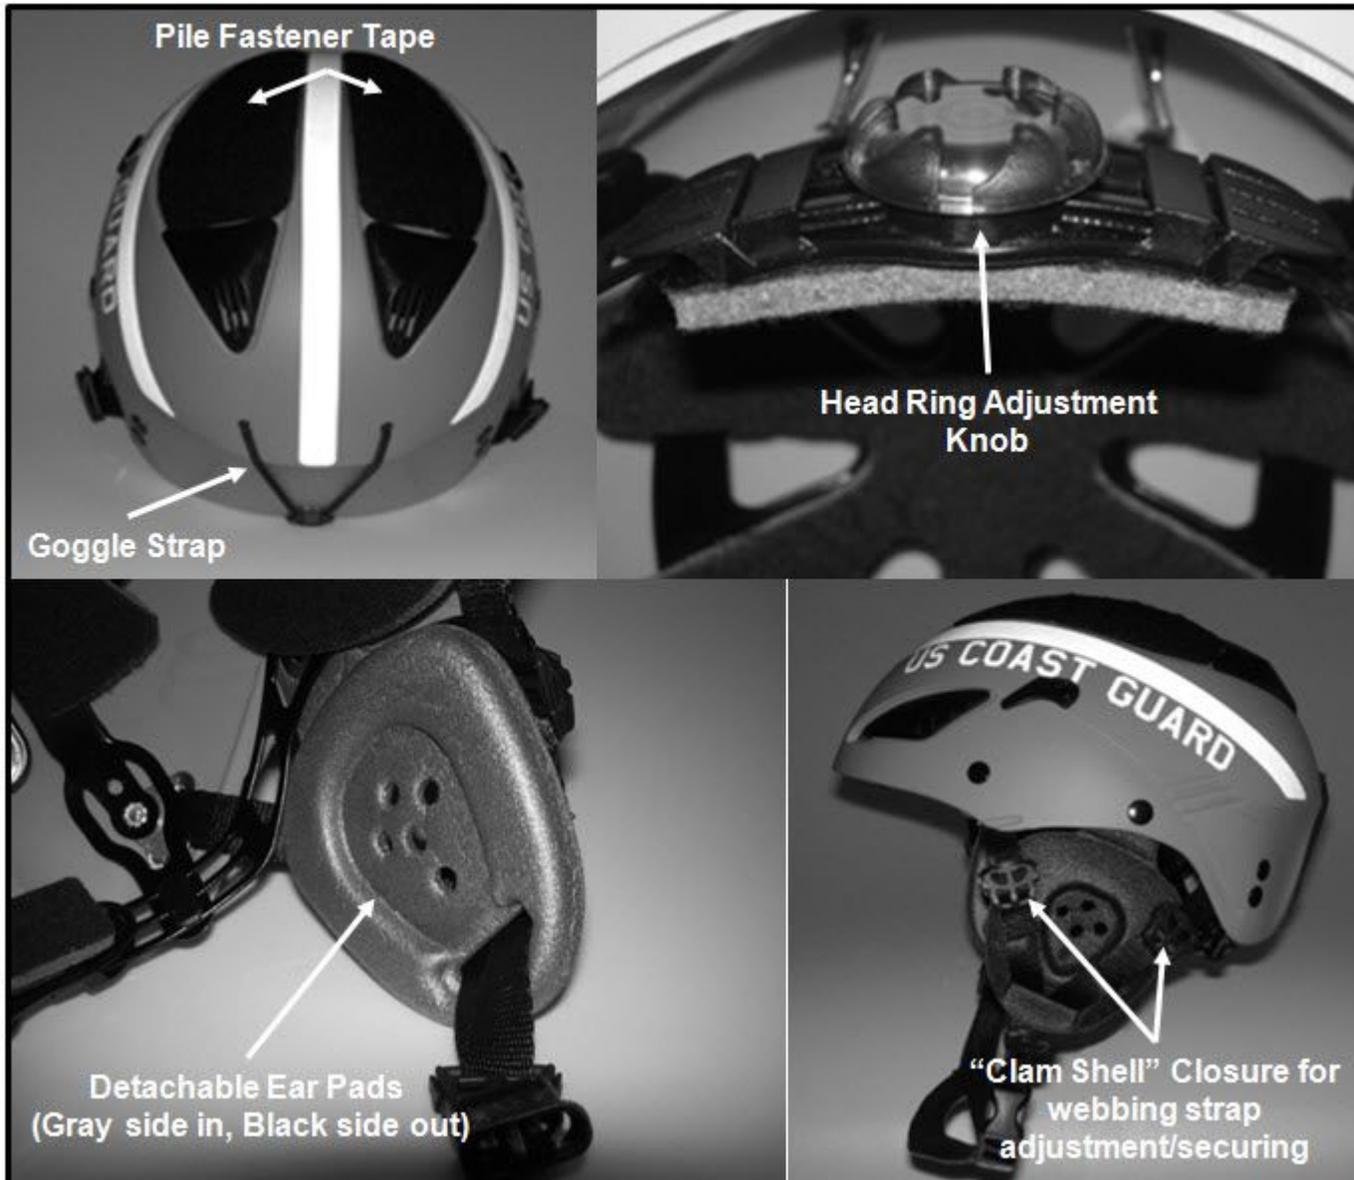

MANGO CEAN XT4 BOAT CREW HELMET

Figure 2

