LATERAL SYSTEMS
(As seen entering from seaward)

Port Side
Odd Numbered Aids

Flashing (2)
Flashing
Occulting
Quick Flashing
Iso

Green light only

Light — Chart Symbol "1" Fl G 6s
Lighted Buoy — Chart Symbol G "9" Fl G 4s
Can — Chart Symbol G "7"
Daymark SG — Chart Symbol G "1"

Starboard Side
Even Numbered Aids

Flashing (2)
Flashing
Occulting
Quick Flashing
Iso

Red light only

Light — Chart Symbol "2" Fl R 6s
Lighted Buoy — Chart Symbol R "8" Fl R 4s
Nun — Chart Symbol R N "6"
Daymark TR — Chart Symbol R "2"

Preferred Channel
(No numbers–May be lettered)

Composite group flashing (2+1)

Preferred channel to starboard
Topmost band green
Chart Symbol GR "C" Fl (2+1) G 6s
Chart Symbol GR C "L" — Can
Chart Symbol GR "A" — JG

Green light only

Composite group flashing (2+1)

Preferred channel to port
Topmost band red
Chart Symbol RG "B" Fl (2+1) R 6s
Chart Symbol RG N "V" — Nun
Chart Symbol R G "B"

Red light only

Special Marks
(May be lettered)

Yellow light only
Fixed
Flashing

Chart Symbol Y C "A" — Unlighted
Chart Symbol Y N "C" — Unlighted
Chart Symbol Y "A" Bn
Chart Symbol Y "B" Fl — Lighted

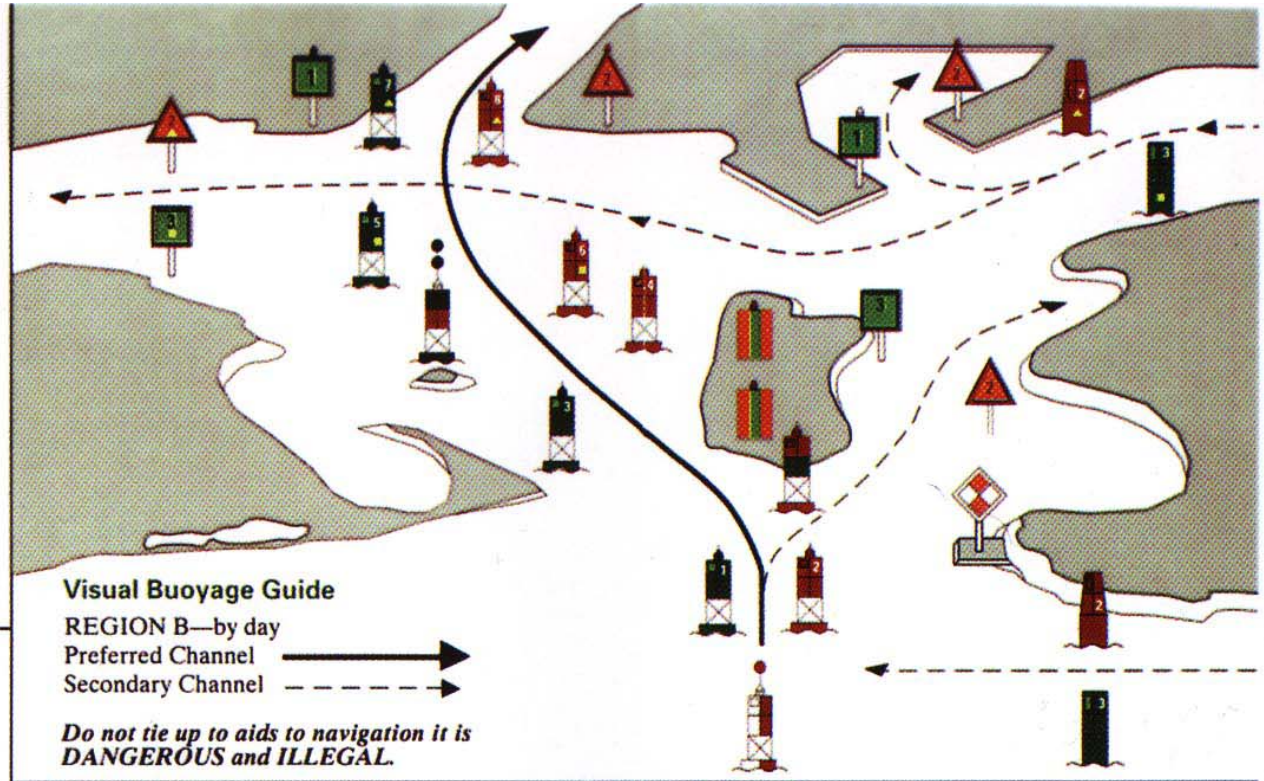

Visual Buoyage Guide
REGION B—by day
Preferred Channel
Secondary Channel

Do not tie up to aids to navigation it is DANGEROUS and ILLEGAL.

Safe Water
(No numbers–May be lettered)

Morse Code Mo (A)
White light only

Lighted and/or sound — Chart Symbol RW "N" Mo (A)
Unlighted and/or sound — Chart Symbol RW "N"
MR — Chart Symbol RW "A"
Spherical — Chart Symbol RW SP "G"

Typical Information And Regulatory Marks

Exclusion Area
Restricted Operations
Danger
NW — Chart Symbol W Bn
White light only

Isolated Danger
(No numbers–May be lettered)

Morse Code Fl (2) 5s
White light only

Lighted — Chart Symbol BR "A" Fl (2) 5s
Unlighted — Chart Symbol BR "C"

Range Daymarks
(May be lettered)

KGW KWG KWB KBW KWR KRW KRB KBR KGB KBG KGR KRG

Daymarks Having No Lateral Significance
(May be lettered)

White light only

NR — Chart Symbol RW Bn
NG — Chart Symbol GW Bn
NB — Chart Symbol BW Bn